



Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada

PCT/CA 2004/001971

09 DECEMBER 2004 09.12.04

*Bureau canadien
des brevets
Certification*

*Canadian Patent
Office
Certification*

REC'D 28 DEC 2004

WIPO

PCT

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial No:
2,449,551, on November 17, 2003, by **PHOTON CONTROL INC.**, assignee of Ivan
Melnik, for "Optical Device and Method for Sensing Multiphase Flow".

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Agent certificateur/Certifying Officer

December 9, 2004

Date

BEST AVAILABLE COPY

Canada

(CIPO 68)
31-03-04

OPIC



CIPO

OPTICAL DEVICE AND METHOD FOR SENSING MULTIPHASE FLOW

Technical Field

- 5 **[0001]** The present invention relates to optical flow meters for sensing the velocity of fluids, including mixtures of gaseous and liquid fractions such as steam, moving in a pipe.

Background

- 10 **[0002]** The need for measurement of the velocity and flow rate of steam, for example, is a known problem in industrial control because steam is widely used as an energy carrier in many processes and because measurement of steam flow is a complicated task. The main reason for this complication is the presence of two fractions in the flow,
15 a gaseous or vapour phase which is mixed with a liquid phase (water). The liquid phase moves in the pipe in the form of water droplets of various sizes, fluctuating water aggregates and water condensate which collects in the bottom of the pipe if quality of steam is low. Each of the components moves with different speed. The proportion between these
20 components varies in time, water aggregates can combine together and water condensate can suddenly be picked up and be accelerated by the flow creating a "hummer effect." In addition, the quality of steam changes along the pipe depending on the temperature outside of the pipe, pipe insulation, pipe bending, etc. All these factors make steam
25 flow complicated for measurement.

- [0003]** A number of solutions have been proposed for measuring steam flow. Some are based on tracing the electrical properties of steam and water by means of measuring capacitance of the fluid at
30 several points along the pipe or by tracking the variation of fluid density with ultrasound. The main drawback of these methods is high inconsistency with operating temperature. High-power industrial boilers run at temperatures higher than 350°C which are beyond the limit of capaci-

- 2 -

tive and ultrasonic methods. Other solutions based on gamma-irradiation methods could be applicable for steam measurement; however, gamma-irradiation is expensive and it creates a risk for operating personnel.

5

[0004] Cross-correlation methods for non-invasive measurement of fluid flow using optical means are known in the art. Optical methods usually are not adversely affected by high temperature because light sources and photodetectors can be located remotely from the hot measuring zones. U.S. Patent No. 6,611,319 (Wang) describes an optical flow meter which is based on registration of the light twinkled (scintillated) due to the small changes of the refractive index with changes in temperature. The moving fluid is transilluminated by a single light source and the direct light is measured by two photodetectors spaced apart along the direction of flow. A cross-correlation function between signals from those photodetectors is calculated and a position of its maximum is determined. This position provides the average time which is necessary for the flow to move from one photodetector to the other. Consequently, the ratio of the distance between the photodetectors to the time delay gives an estimate of the average velocity of the flow.

10

15

20

[0005] A similar correlation technique has been described in WO 02/077578A1 (Hyde) for measuring gas flow in large pipes using attenuation of the light by the gas stream. Different constituents in the moving gas may have different absorption in the infrared region, which will cause modulation of the light passing through the pipe.

25

[0006] However, both scintillating method of Wang and the infrared absorption method of Hyde require long optical paths in order to accumulate enough abnormalities in the flow. Such methods require minimum pipe diameter of about one meter in order to perform reliable

30

- 3 -

flow measurements. Diameters such as these are too big for steam pipelines where maximum diameter is 12 inches (30cm) and most pipe sizes are from 2 inches (5cm) to 6 inches (15cm). In addition, the highly divergent light beam from the single light source used in the scintillating method of Wang spreads the time delay because different portions of the fluctuated flow cross the beam at different locations. This reduces the accuracy of the measurement. Collimated beams used in the infrared absorption method of Hyde are not affected by this effect, but steam does not absorb much light. High quality steam, in particular, is highly transparent over a wide range of wavelengths. Unscattered light, therefore, has a very low modulation depth due to the high intensity of direct light from the light source. In addition, none of the optical methods described above have been applied for sensing the quality of steam, which is of the same importance as velocity and flow measurement.

[0007] Therefore, there is a need for an apparatus and method for sensing the flow velocity of mixtures of gas and liquid such as occurs, for example, for steam moving in small pipes.

Summary of Invention

[0008] An object of the present invention is to provide an optical device and a method for sensing steam flow in industrial pipes.

25 [0009] It is another object of the invention to provide such an optical device and a method that will be suitable for steam of varying quality.

30 [0010] It is a further object of the invention to provide such an optical device and a method that may simultaneously sense the quality of steam.

- 4 -

[0011] According to a preferred embodiment of the present invention, two or more narrow collimated beams of light are directed towards a fluid flowing within in a pipe through transparent windows in the walls of the pipe. The beams are spaced apart along the direction of the flow. Liquid droplets and other flow components which are moving through the pipe cross the beams and scatter and deflect the light. Scattered and deflected light passes through transparent windows in the opposite side of the pipe and is focused by a collecting optical system into photodetectors. Unscattered light may be collected by another optical system for monitoring purposes and for absorption measurement if the quality of the steam is low.

[0012] In one embodiment, signals from the photodetectors are digitized and separated into different groups by filtering them with digital band-pass filters. The groups are associated with different steam components such as, for example, miniature, medium, and large droplets, and water aggregates. The differentiation is based on frequency bandwidths; lower frequencies correspond to larger droplets and higher frequencies correspond to smaller droplets. Cross-correlation functions are calculated for each group and time delays between signals from spaced apart beams are determined. The average velocity of each steam component is calculated as a ratio of spacing distance between the beams over time delay. The local velocity of each steam component is sensed by illuminating the flow with two beams from a variety of directions and collecting the deflected and scattered light from a variety of measuring zones across the pipe. According to another embodiment of the invention, additional vertical beams are delivered through the horizontally disposed pipe, thus the level of liquid condensate is measured by sensing the light absorption. Flow intensity of each flow component is determined by calculating dispersion of filtered signals.

- 5 -

Total flow rate is calculated as the sum of all flow components measured in all measuring zones across the pipe. Gaseous or vapour fraction is defined as the fastest flow fraction moving in the pipe.

5 **[0013]** According to another embodiment of the invention, there is provided a method for measuring the velocity of a multiphase fluid flowing in a pipe. The method comprises the steps of: directing a pair of collimated beams of light from an illuminator through the multiphase fluid by means of transparent portions of the pipe, the pair of collimated
10 beams spaced apart in a direction of flow of the multiphase fluid by a predetermined distance; detecting scattered, deflected and attenuated light with a pair of photodetectors to produce a pair of signals, each of the pair of photodetectors associated with one of the pair of collimated beams; calculating a cross-correlation function between the pair of
15 signals to determine a time delay between the signals; and, calculating the average velocity of the multiphase fluid by taking the ratio of the predetermined distance to the time delay.

20 **[0014]** The described optical device and method are suitable for measuring the multiphase flow such as steam in a small pipe and provide qualitative analysis of the moving media, such as steam quality. The method is highly sensitive because it detects microscopic water droplets in high quality steam as well as large water droplets and water aggregates in low quality steam.

25 **[0015]** In this specification, water and steam measurement are referenced, but the invention applies equally to all transparent liquids and their corresponding gases. The invention can be applied to mixtures of water and hydrocarbons such as, for example, natural gas moving in
30 a pipe. Sensing is provided by calculation of cross-correlation between signals from a number of photodetectors disposed along the pipe, which

- 6 -

register light scattered by the gaseous fraction and deflected and absorbed by the liquid fraction.

5 [0016] The present invention as well as its numerous advantages will be better understood by the following nonrestrictive description of possible embodiments made in reference to the appended drawings.

Brief Description of Drawings

10 [0017] In drawings which illustrate non-limiting embodiments of the invention:

Figure 1 is a schematic representation of an apparatus for sensing multiphase flow according to one embodiment of the invention;

Figure 2 is a schematic representation a portion of an optical system suitable for use with the apparatus of Figure 1;

15 Figure 3A is an example of signal detected by a photodetector indicating the presence of miniature and large size water droplets;

Figure 3B is an example of signal detected by a photodetector indicating the presence of medium size water droplets and water aggregates;

20 Figure 4A is a schematic representation of signals from two photodetectors indicating a temporal shift caused by the displacement of the light beams along the flow;

Figure 4B is an illustration of the cross-correlation function between the two signals of Figure 4A;

25 Figure 5 is an example of four cross-correlation functions corresponding to four different components in steam flow;

Figure 6 is a schematic representation of an apparatus for sensing multiphase flow employing a vertical two-beam channel for measurement of water condensate according to another embodiment of
30 the invention;

- 7 -

Figure 7 is a schematic representation of an apparatus for sensing multiphase flow with an additional measuring zone across the pipe, according to another embodiment of the invention;

5 Figure 8 is a schematic representation of multiple measuring zones across the pipe using multiple optical collecting systems, according to another embodiment of the invention;

Figure 9 is a schematic of a multi-focal coaxial collecting optical system, which collects light from the multiple measuring zones of Figure 8;

10 Figure 10 is a schematic of a multi-focal coaxial collecting optical system, which collects light from the multiple measuring zones of Figure 8, working in back-scattering mode;

15 Figure 11 is a block diagram illustrating an example of signal processing in a single channel with two photodetectors and multiple band-pass filters; and,

Figure 12 is a block diagram illustrating an example of a calculation of liquid and gas flow rates based on m measuring channels and n flow components.

20 Description

[0018] Throughout the following description, specific details are set forth in order to provide a more thorough understanding of the invention. However, the invention may be practiced without these particulars. In other instances, well known elements have not been
25 shown or described in detail to avoid unnecessarily obscuring the invention. Accordingly, the specification and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

[0019] Figure 1 shows a first embodiment of an optical device for
30 sensing multiphase flow. An illuminator 10 generates two narrow collimated beams of light 12 and 14, which enter a fluid-carrying pipe

- 8 -

16 through an illuminating window 18. Beams 12 and 14 may comprise infrared, ultraviolet, or visible light. Beams 12 and 14 are disposed apart at a distance d along the direction of fluid flow. Beams 12 and 14 are scattered, deflected and absorbed by the fluid moving through pipe
5 16. Scattered and deflected light passes through a collecting window 19 at the opposite wall of the pipe. The light passing through collecting window 19 is collected by an optical system (not shown in Figure 1), and focused onto a photodetector array 20. Photodetector array 20 preferably comprises photodetectors 20a and 20b positioned to receive
10 scattered and deflected light collected by the optical system under different angles, so photodetectors 20a and 20b can measure light scattered and deflected at different degrees from the optical axis of beams 12 and 14, respectively. Photodetector array 20 preferably also comprises photodetectors 20c and 20d positioned to receive direct
15 (unscattered) light collected by the optical system, so that photodetectors 20c and 20d can measure the absorption of light from beams 12 and 14, respectively, by the flow.

[0020] Figure 2 schematically illustrates a portion of an optical
20 system 22 suitable for use with the embodiment of Figure 1. The illustrated portion of optical system 22 comprises optical collectors 24 and 26. A liquid droplet 21, moving in the pipe crosses beam 12. Droplet 21 scatters and deflects a portion of the light in beam 12 in a manner depending on the ratio of its size to the wavelength of the light
25 and its refractive index. Smaller droplets with sizes comparable to the wavelength of the light predominantly scatter light in large solid angles, while larger droplets mostly deflect light in shallow angles. Scattered and deflected light 23 spreads inside the pipe and a portion of it passes through window 19 and is focused by optical collector 24 into
30 photodetector 20a. The direct (unscattered, but attenuated) light 27 passes through window 19 and either is eliminated by absorption or is

- 9 -

focused by optical collector 26 into photodetector 20c. Registering the direct light provides power monitoring of the illuminator 10 and indicates the light attenuation due to absorption by very large water droplets.

5

[0021] The signals generated by photodetectors according to the invention are typically made up of a plurality of components of different frequencies. Figures 3A and 3B illustrate examples of typical signals from a photodetector, such as photodetector 20a or 20b, registering
10 scattering light within a shallow angle to the optical axis. The graphs of Figures 3A and 3B plot signals from a photodetector (in millivolts) versus time (in seconds $\times 10^{-4}$). The example signals may be separated into a high-frequency component 32, a medium frequency component 34 and a low-frequency component 36, as well as ultra-slow components
15 38 and 39 (solid line), all created by different components of the fluid flow. Components 32, 34 and 36 are created respectively by miniature (size less than 1 micron), medium (size about a micron), a large (size larger than 2 microns) water droplets, and components 38 and 39 are created by water aggregates fluctuating in the pipe.

20

[0022] The two-beam arrangement shown in Figure 1 leads to a temporal shift of signals. As elements of the fluid flow through pipe 16 they pass through beam 12 before beam 14, and the resultant fluctuations occur in the signal from photodetector 20a before they
25 occur in the signal from photodetector 20b. The shift is schematically shown in Figure 4A for two photodetectors, PD1 and PD2. Photodetectors PD1 and PD2 may comprise any pair of photodetectors which register light from two beams of light separated by the distance d along the direction of the fluid flow. A cross-correlation function
30 between the two signals from PD1 and PD2 will have a maximum at an elapsed time τ (time delay), as illustrated in Figure 4B, defined as

- 10 -

$$\tau = d/V$$

where d is the spacing between the beams, and V is the average velocity of the flow.

5 **[0023]** The signals from photodetectors 20a and 20b may be filtered by band-pass filters, as described below, to isolate components of the signals at different frequencies which are generated by different flow components. The time delay τ is different for different flow components. Miniature water droplets are moving with the speed of
10 water vapour whereas water aggregates are moving at much lower speed, causing a slug effect. Example cross-correlation functions corresponding to flow components 32, 34, 36 and 38/39 described above are illustrated in Figure 5. In the Figure 5 example, the elapsed time for miniature, medium and large droplets, and water aggregates is
15 20, 30, 46 and 70 μ s, respectively. These time delays correspond to average velocities V of 50, 33, 22 and 14 m/s for flow components 32, 34, 36 and 38/39 respectively, for spacing $d=1.0$ mm.

[0024] Figure 6 illustrates another embodiment of the invention
20 wherein an additional pair of beams 62 and 64 generated by another illuminator 66 are delivered through a window 68 into pipe 16 in the vertical direction. Beams 62 and 64 are coupled with a second collecting optical system (not shown in Figure 6) located underneath the pipe in the same way as are beams 12 and 14 in Figure 1. In addition to
25 scattered and deflected light, the second collecting optical system focuses beams 62 and 64 directly on a pair of photodetectors, thus, providing the sensing of the beam attenuation in the water condensate 69 at the bottom of pipe 16. The attenuation is related to the depth h of the water condensate 69 in accordance with Beer's law:

30 $I = I_0 \exp(-ah)$

- 11 -

where I_0 is the intensity of the beam without any water condensate, I is the measured intensity of the beam, and α is the extinction coefficient. The cross-sectional area A of water condensate in pipe 16 is related to depth h as

$$A = R^2 \arccos(1-h/R) - (R-h)(2Rh-h^2)^{1/2}$$

where R is the radius of the pipe. The flow rate of the water condensate F_{cond} may be calculated by multiplying this area by the velocity of the water condensate:

$$F_{cond} = AV_{cond}$$

10

[0025] Collection of the deflected and scattered light from a shallow angle along a beam spanning pipe 16 causes integration of the signal because the flow velocity varies across the section of pipe 16. Therefore, according to yet another embodiment of the present invention shown in Figure 7, in addition to integral evaluation of the average velocity profile, the flow is analyzed at a local measuring zone 70. Light beams 72 and 74 scattered by water droplets at a near perpendicular angle are collected with an optical system 76 into a photodetector unit 78 comprising a pair of photodetectors. The measuring zone 70 can be located at various locations across pipe 16. An example of four measuring zones along the diameter of pipe 16 is shown in Figure 8. Zones could be located at various distances a from the center of the pipe. One of the preferable distances is $a = 3/4 R$. Local flow velocity measured at this location is the closest to the average velocity in pipe 16 with practically no effect from the flow profile.

[0026] Multiple point flow measurement can be simplified if a transparent section 89 is mounted into pipe 16. This section may represent a section of a glass pipe having the same internal diameter as pipe 16. Multiple point measurement could be achieved by using a

30

- 12 -

multi-focal optical system such as one shown in Figure 9. The optical system 110 consists of several optical components of various apertures, therefore, the optical power of the system varies with the number of components. In the example of Figure 9, four measuring zones 112, 114, 116 and 118 are associated optically with four photodetectors 122, 124, 126 and 128, respectively, which measure scattered and deflected light from the measurement zones.

[0027] Scattered and deflected light can also be collected in a back-scattered mode as is shown in Figure 10. Photodetectors 132, 134, 136 and 138 measure scattered and deflected light from measuring zones 118, 116, 114 and 112, respectively, by means of a multi-focal optical system 130. The advantage of the back-scattering mode is the lower amount of background noise coming from the light scattered on pipe walls because the light being registered has been scattered under high angles.

[0028] Figure 11 schematically illustrates a signal processing means according to one embodiment of the invention. Electrical signals from photodetectors 140 and 142, which may be any pair of photodetectors spaced apart along the direction of flow, are amplified (amplifiers are not shown) and digitized in analog-to-digital converters 144 and 146. Preferably, digital signals further are processed by digital signal processor (DSP). The signals are filtered by digital band-pass filters 150, 152, 154, 160, 162 and 164. The number of digital filters may vary depending on the number of fluid components to be discriminated, which, in turn, is determined by the desired accuracy. The filter frequency bandwidth is determined by the number of bands to be selected and maximum fluid velocity. For example, to discriminate four-components of the steam flow with a maximum velocity of 50m/s,

- 13 -

the preferable bandwidths are: $\Delta f_1 = 0$ to 10 Hz; $\Delta f_2 = 10$ to 100 Hz; $\Delta f_3 = 100$ Hz to 1 kHz; and, $\Delta f_4 = 1$ to 100 kHz.

[0029] Cross-correlation functions are calculated for each pair of signals filtered with the same bandwidth using cross-correlation (CC) procedures 170, 172, 174. Time delay τ_i for each CC function is determined as a position of the CC maximum. Local velocities are calculated for each flow component using the ratio:

$$V_i = d/\tau_i$$

As described above, the fastest measured flow components are the miniature water droplets which move at the speed of the vapour fraction in pipe 16.

[0030] In addition to the velocities, the amount of each of the flow components may be calculated from the intensities of the filtered frequency components of the signals. For example, low intensity fluctuations recorded at bandwidth $\Delta f_3 = 100$ to 1,000 Hz indicate that the amount of medium size droplets (size about a micron for saturated steam) is low. The signal intensity at each bandwidth I_i is representative of the amount of the liquid fraction of each flow component. The relationship between I_i and the amount of the corresponding flow components is preferably established by calibration in a regulated flow environment. The intensities are preferably found as signal dispersions

$$I_1 = \int_{\Delta f_1} (U_p)^2 df$$

$$I_2 = \int_{\Delta f_2} (U_p)^2 df$$

$$I_n = \int_{\Delta f_n} (U_p)^2 df$$

- 14 -

where U_f is the spectral density of the signal, which represents the distribution of signal dispersion in frequency domain. The spectral density can be measured by using Fourier transforms or by any other known means.

5

[0031] After calculating the velocities of the flow components and the intensities of the corresponding signals (which is indicative of the amount of the corresponding flow component) for each measuring zone or "channel", the final liquid (water) and gas (vapour) flow rates are found as is shown in Figure 12. The number of channels depends on the number of pairs of beams illuminating the fluid flow and the number of measurement zones for each pair of beams. The time delay τ and intensity I are calculated for each of the n components for each of the m channels, and provided to a flow rate calculator 200. Flow rate calculator 200 also receives as inputs pressure and temperature data and the level of condensate 69 in the bottom of pipe, as calculated from absorption data as described above.

[0032] The vapour fraction is calculated from the fastest of the n -flow components, which are the n th components when Δf_n is the highest frequency bandwidth, over all m channels as follows:

$$F_{vapour} = \sum_{i=1}^m I_{in} V_{in}$$

[0033] The total of the liquid and vapour fractions is calculated as a sum over all flow components:

25

$$F_{total} = \sum_{j=1}^n \sum_{l=1}^m I_{lj} V_{lj}$$

- 15 -

[0034] The quality of steam may be determined by the ratio:

$$Q = \frac{\text{Vapour}(\text{mass})}{\text{Vapour}(\text{mass}) + \text{Water}(\text{mass})} = \frac{F_{\text{vapour}}}{F_{\text{total}}}$$

5

[0035] The equations above are corrected by pressure and temperature factors. The liquid condensate may be taken into account by calculating the cross-section of the pipe filled with liquid at a level (depth) h based on the absorption measurement described above with
10 reference to Figure 6.

[0036] The embodiments above can be accomplished by a variety of ways. Preferably, light emitting diodes (LED) are used in illuminators as light sources. In particular, green, red and near-infrared
15 LEDs are suitable for this application as they are matched well with readily available and sensitive Si-photodiodes, which may be used as photodetectors. UV and blue LED provide better scattering efficiency due to the shorter wavelength, however, this may lead to high
20 background light scattered inside pipe 16 and on optical windows, in particular. It is desirable to use fiber optic components in illuminating and collecting optics because the operating temperature for steam pipelines is too high for direct contact with light sources and
25 photodetectors. Semiconductor lasers are more suitable for fiber optics because they provide high coupling efficiency to thin fibers. Intensive laser beams (power ranging from 1 to 10 mW) can be delivered through the windows at long distances using inexpensive visible and
near-infrared lasers. Liquid fractions in the flow effectively scatter and deflect the propagating light, which can be collected at the photodetectors. The amount of light collected by the optical system

- 16 -

such as the dark-field system shown in Figure 9, can reach 1 W in a 2-inch steam pipeline. Such light intensity provides the signal-to-noise ratio in excess of 104 in regular PIN photodiodes or avalanche photodiodes. Therefore, time delays can be measured with high accuracy. The device and method described above provide good averaging of flow velocity across the pipe. This reduces the error caused by the uncertainty of the flow profile and flow profile skewing which is the major source of the inaccuracy for ultrasonic flow meters. The described method is not affected by shock or vibration because it is not based on interference. Lastly, the present invention provides a robust and a reliable device, and a method, which are not affected by turbulence. As opposed to other non-invasive flow metering techniques, such as, for example, ultrasonic methods, the flow turbulence is used in the present invention for modulation of scattered and deflected light. The modulation depth increases with the turbulence level.

[0037] As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention without departing from the spirit or scope thereof. For example, although the embodiment of Figure 1 described above employs two beams and four photodetectors, it is to be understood that more than two beams could be used and the cross-correlation functions could be applied to any two of the beams. Also, the signals could be measured by any number of photodetectors, provided there is at least one photodetector for each beam. Accordingly, the scope of the invention is to be construed in accordance with the substance defined by the following claims.

- 17 -

WHAT IS CLAIMED IS:

1. A method for measuring the velocity of a multiphase fluid flowing in a pipe, the method comprising:
 - 5 (a) directing a pair of collimated beams of light from an illuminator through the multiphase fluid by means of transparent portions of the pipe, said pair of collimated beams spaced apart in a direction of flow of the multiphase fluid by a predetermined distance;
 - 10 (b) detecting scattered, deflected and attenuated light with a pair of photodetectors to produce a pair of signals, each of said pair of photodetectors associated with one of said pair of collimated beams;
 - (c) calculating a cross-correlation function between said pair of signals to determine a time delay between the signals; and,
 - 15 (d) calculating the average velocity of the multiphase fluid by taking the ratio of the predetermined distance to the time delay.
- 20 2. A method according to claim 1 further comprising passing the pair of signals through a plurality of band-pass filters to isolate a plurality of pairs of corresponding frequency components, each of the plurality of pairs of corresponding frequency components corresponding to one a plurality of flow components.
- 25 3. A method according to claim 2 further comprising, for each of said plurality of pairs of corresponding frequency components:
 - 30 (a) calculating a cross-correlation function between the pair of corresponding frequency components to determine a time delay between the corresponding frequency components; and,

- 18 -

- (b) calculating the velocity of the corresponding flow component by taking the ratio of the predetermined distance to the time delay between the corresponding frequency components.

5

4. A method according to claim 3 further comprising determining an intensity of each of said pairs frequency components and calculating an amount of a corresponding one of said plurality of flow components from said intensity.

10

5. A method according to claim 4 further comprising determining a flow rate of each of said plurality of flow components by multiplying the velocity of each flow component by the intensity of the corresponding pair of frequency components.

15

6. A method according to claim 5 wherein a vapour fraction of said multiphase flow is calculated as a flow rate of a fastest one of said plurality of flow components.

20

7. A method according to claim 6 further comprising determining a total flow rate of said multiphase flow by summing the flow rates of all of said plurality of flow components.

25

8. A method according to claim 7 further comprising calculating a quality of the multiphase flow by taking a ratio of the vapour fraction to the total flow rate.

30

9. An apparatus for measuring the velocity of a multiphase fluid flowing in a pipe, the apparatus comprising:

- (a) an illuminator for generating a pair of collimated beams of light from and directing said beams through the multiphase

- 19 -

fluid by means of transparent portions of the pipe, said pair of collimated beams spaced apart in a direction of flow of the multiphase fluid by a predetermined distance;

- 5 (b) a pair of photodetectors positioned across the pipe from said illuminator, each of said pair of photodetectors optically associated with one of said pair of collimated beams for detecting scattered, deflected and attenuated light from the associated beam and generating a signal; and,
- 10 (c) a signal processing means for processing the signals from said pair of photodetectors and calculating cross-correlation functions between the signals to determine a time delay, and for calculating the velocity of the multiphase fluid by taking a ratio of the predetermined distance to the time delay.

15

10. An apparatus according to claim 9 wherein said signal processing means comprises a plurality of band-pass filters for isolating a plurality of frequency components of each of the pair of signals.

20

11. An apparatus according to claim 9 wherein said illuminator comprises a first illuminator for generating a first pair of collimated beams, and wherein said pair of photodetectors comprises a first pair of photodetectors, the apparatus further comprising:

25

- (a) a second illuminator for generating a second pair of collimated beams of light from and directing said second pair of beams through the multiphase fluid at an angle to said pair of beams generated by said first illuminator; and,
- 30 (b) a second pair of photodetectors positioned across the pipe from said second illuminator, each of said second set pair of photodetectors optically associated with one of said

- 20 -

second pair of collimated beams for detecting scattered,
deflected and attenuated light from the associated beam and
generating a signal,

5 wherein said signals from said second pair of photodetectors are
processed by said signal processing means.

12. An apparatus according to claim 11 wherein the angle is
perpendicular.

10 13. An apparatus according to claim 9 further comprising at least one
optical system for focusing light scattered at a near perpendicular
angle from said pair of collimated beams from at least one
measurement zone onto at least one photodetector.

15 14. An apparatus according to claim 9 further comprising a multi-
focal optical system for focusing light scattered at a shallow angle
from said pair of collimated beams from a plurality of
measurement zones onto a plurality of photodetectors.

20 15. An apparatus according to claim 9 further comprising a multi-
focal optical system for focusing light scattered at a near 180
degree angle from said pair of collimated beams from a plurality
of measurement zones onto a plurality of photodetectors.

25

- 21 -

Abstract of the Disclosure

The invention provides a method for measuring the velocity of a multiphase fluid flowing in a pipe. The method comprises directing
5 at least two collimated beams of light from an illuminator through the multiphase fluid by means of transparent portions of the pipe, the at least two collimated beams spaced apart in a direction of flow of the multiphase fluid by a predetermined distance; detecting scattered, deflected and attenuated light with at least two photodetectors to produce
10 at least two signals, the at least two photodetectors associated with the at least two collimated beams; calculating a cross-correlation function between the at least two signals to determine a time delay between the signals; and, calculating the average velocity of the multiphase fluid by taking the ratio of the predetermined distance to the time delay.

1/12

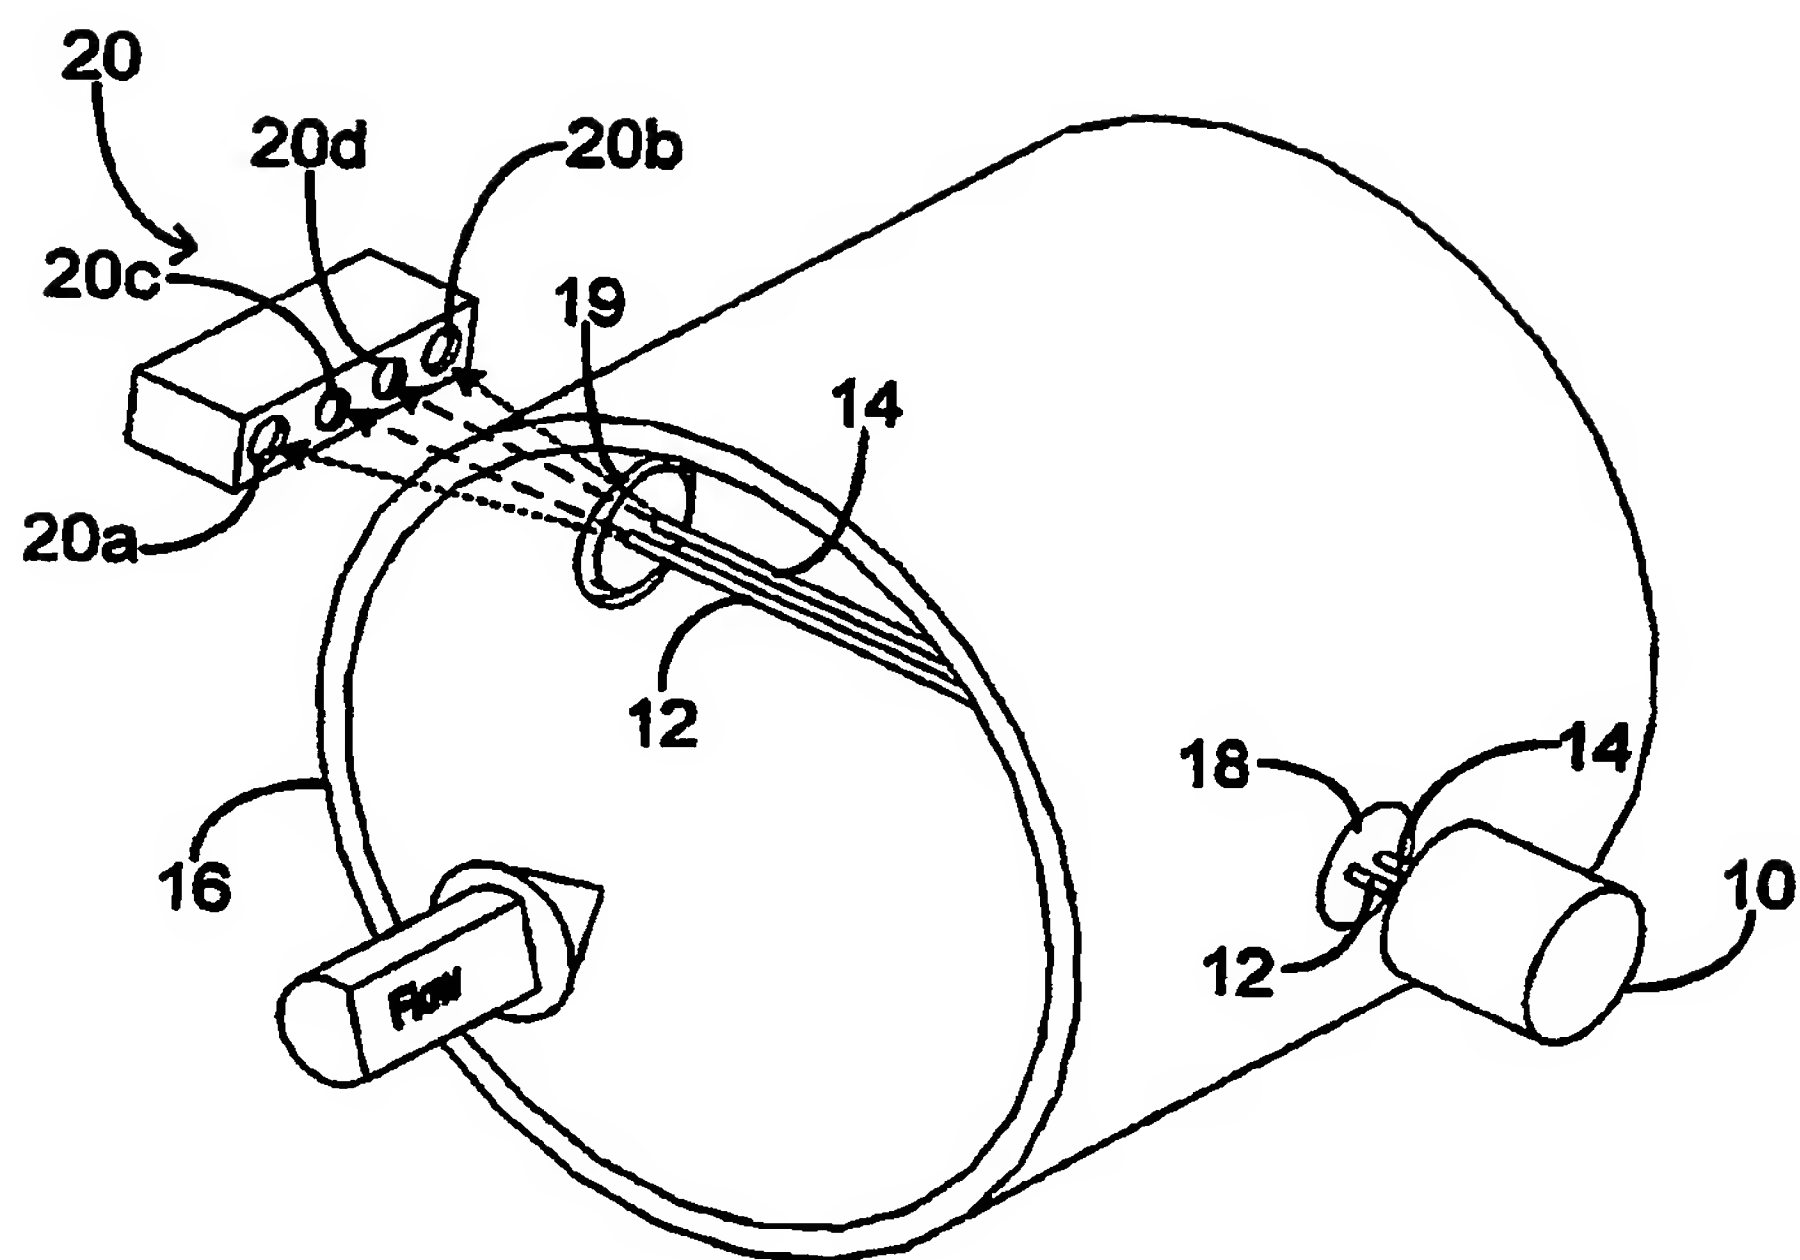


FIGURE 1

THIS PAGE BLANK (INSERT)

2/12

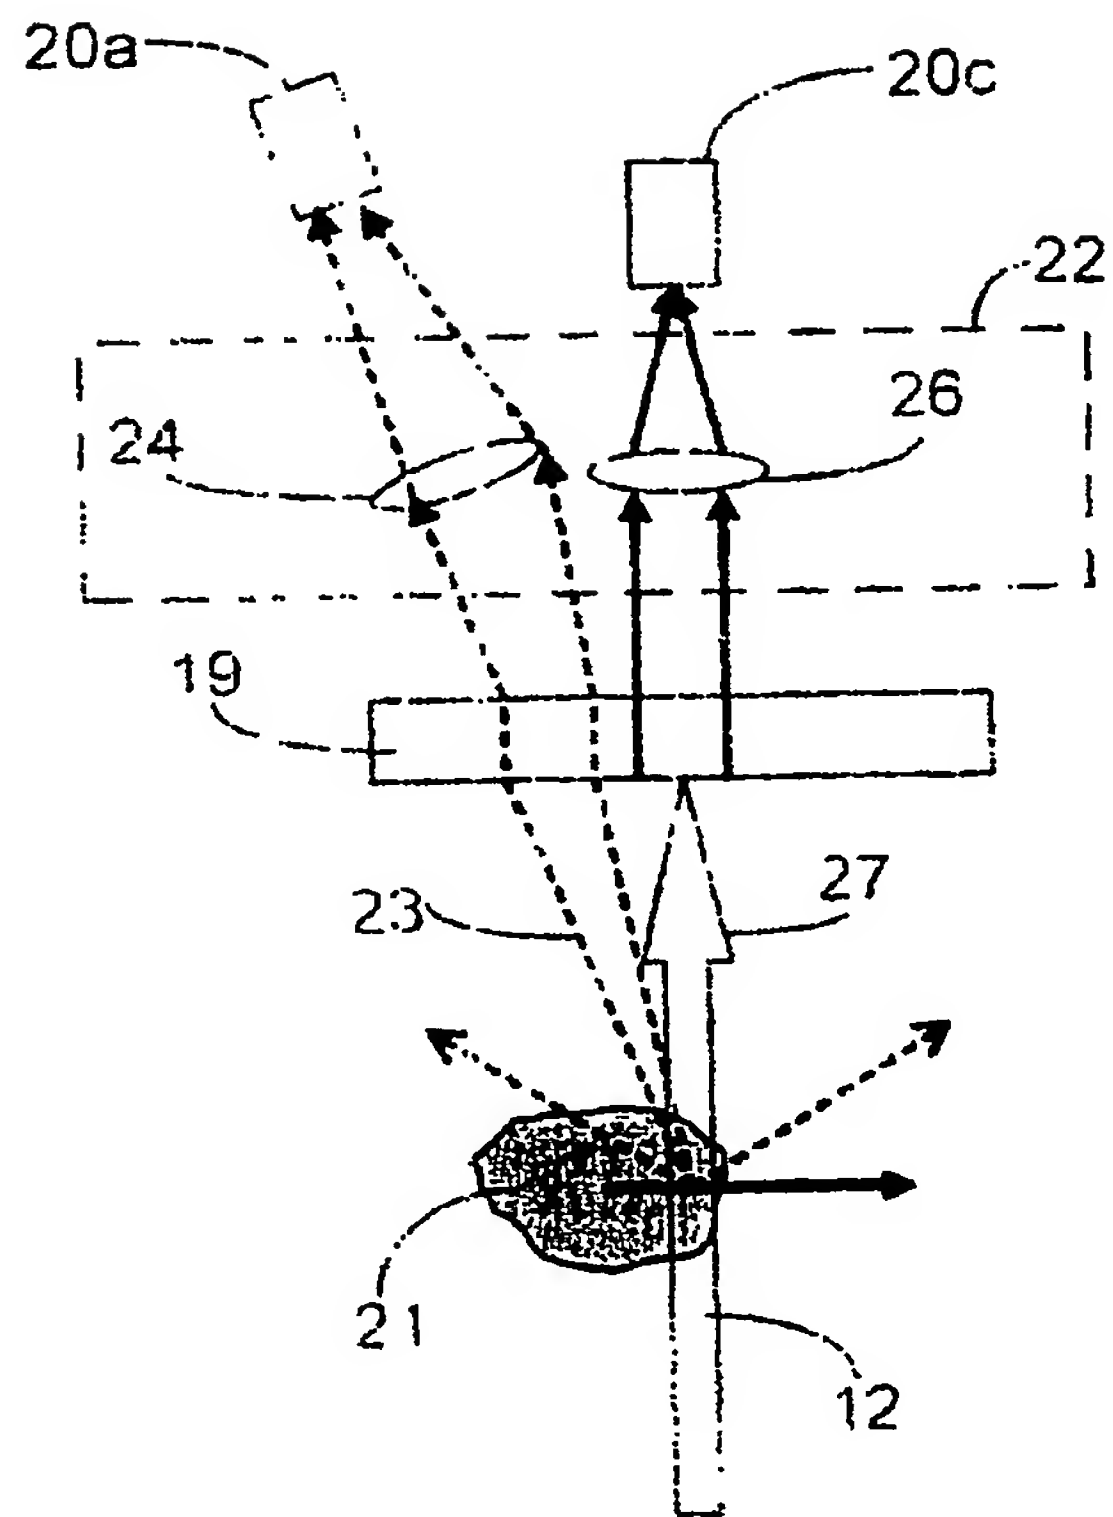


FIGURE 2

3/12

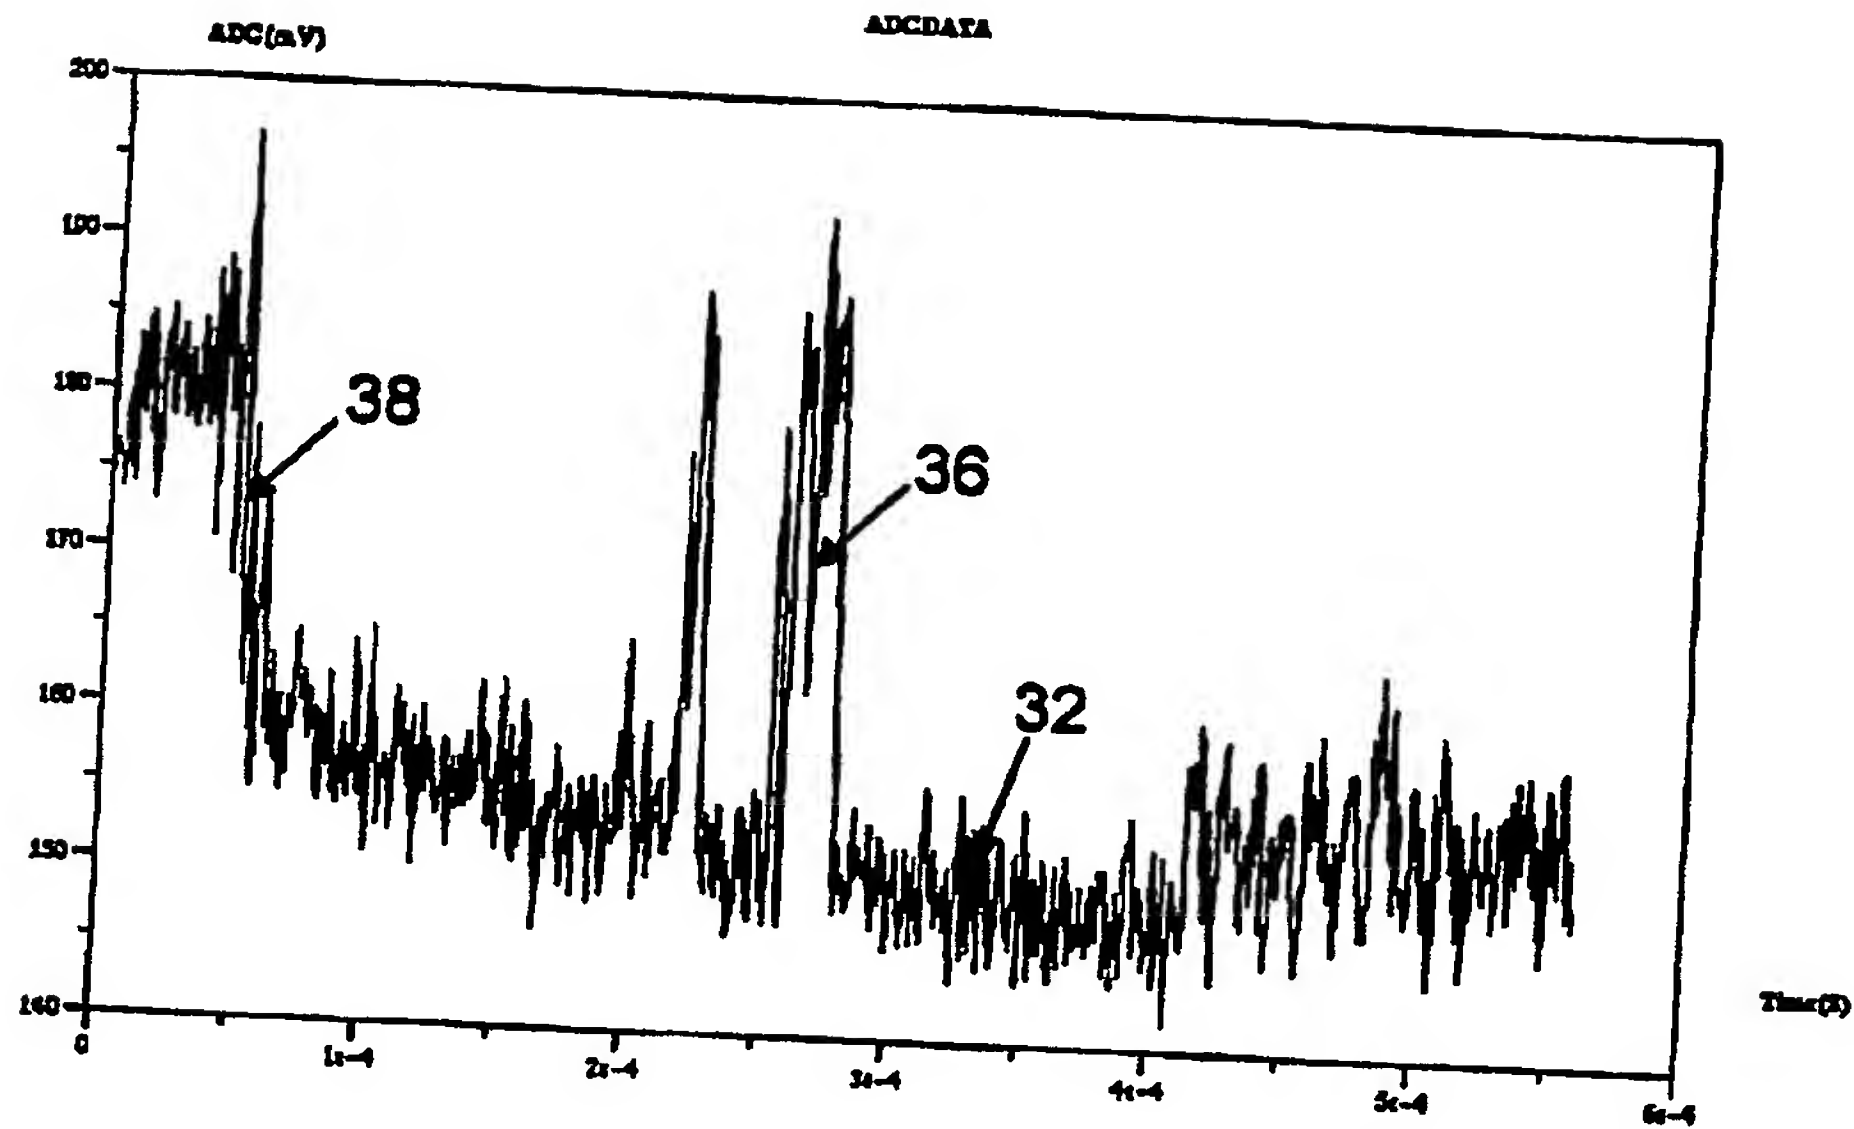


FIGURE 3A


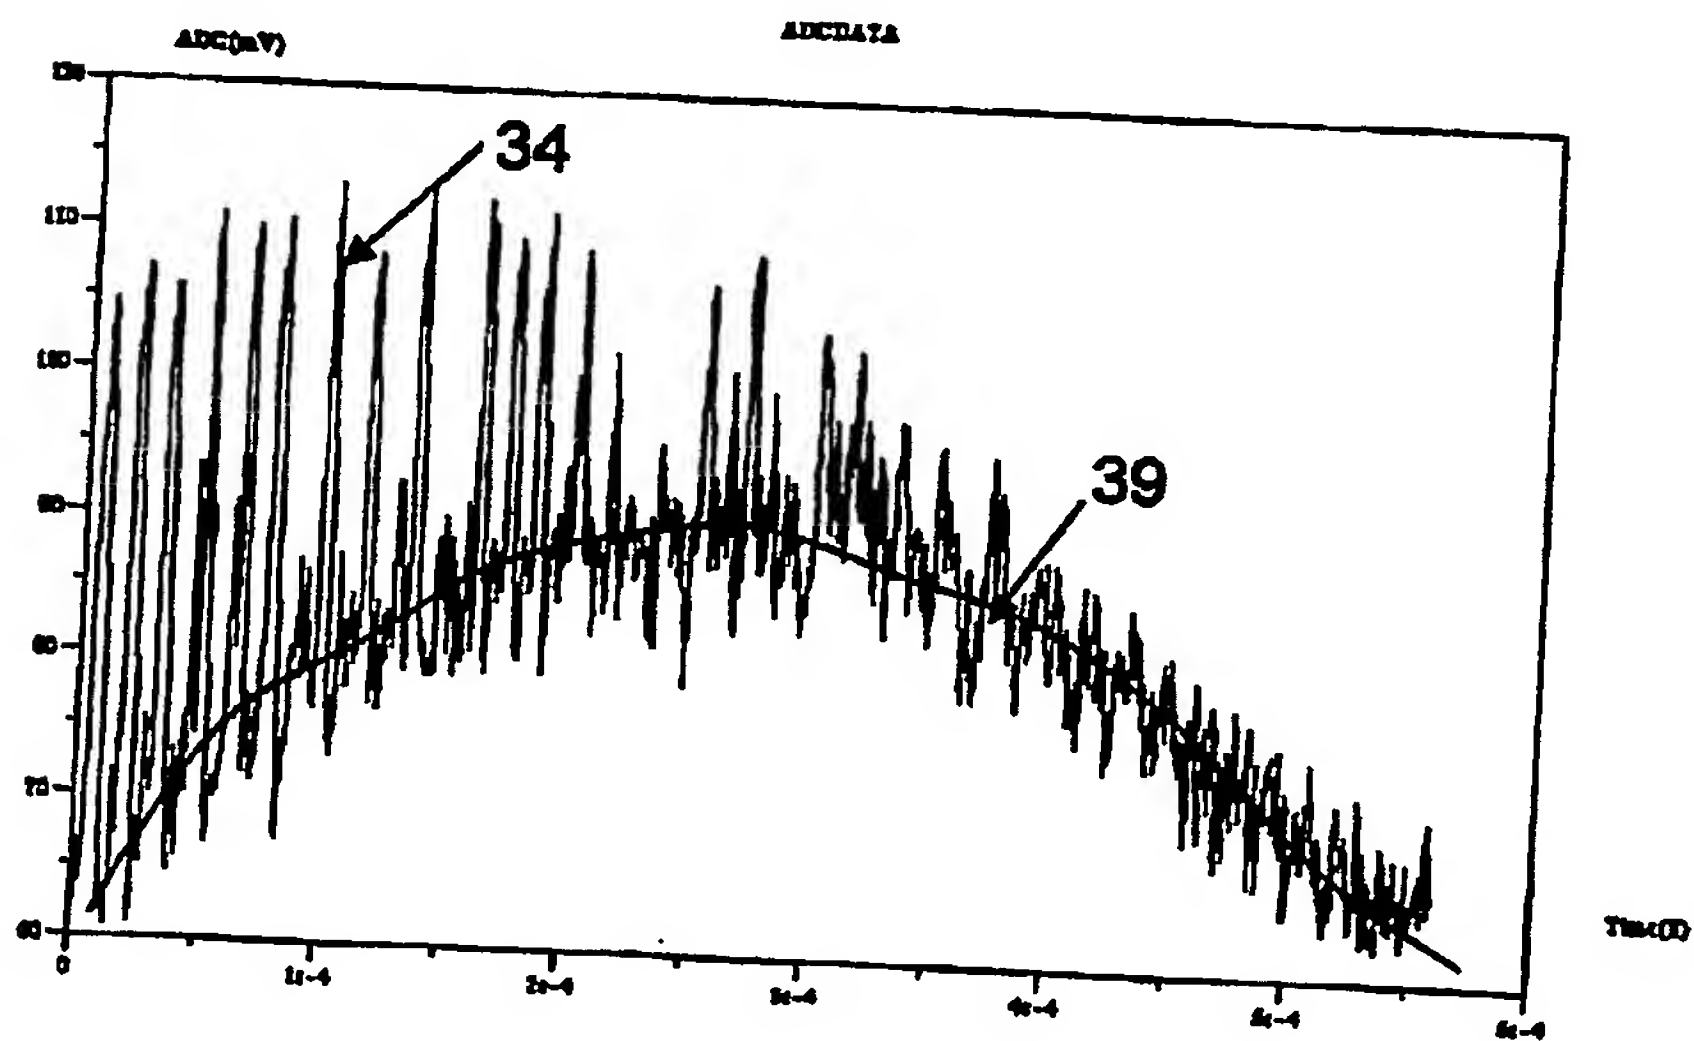


FIGURE 3B

4/12

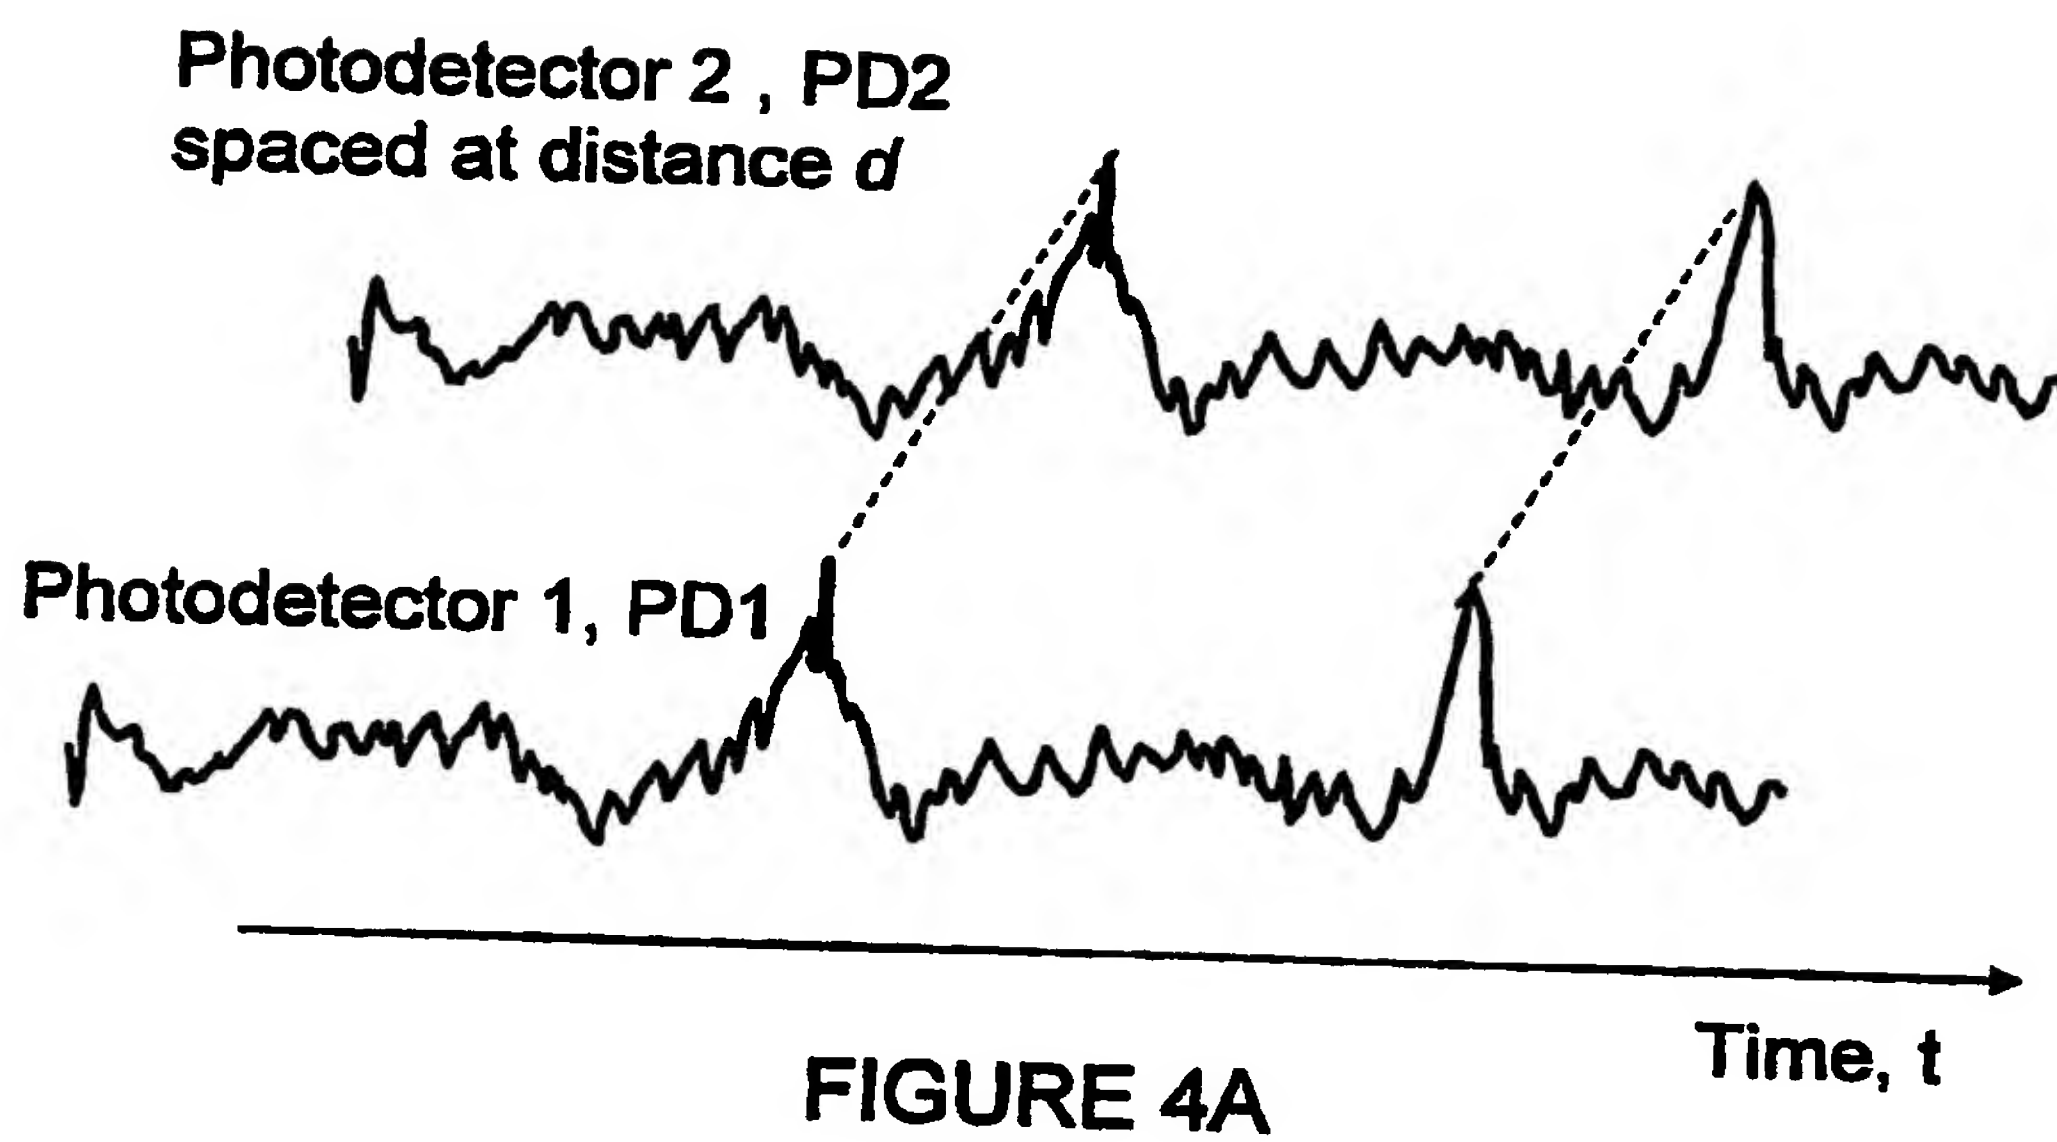

Cross-correlation
PD1 & PD2

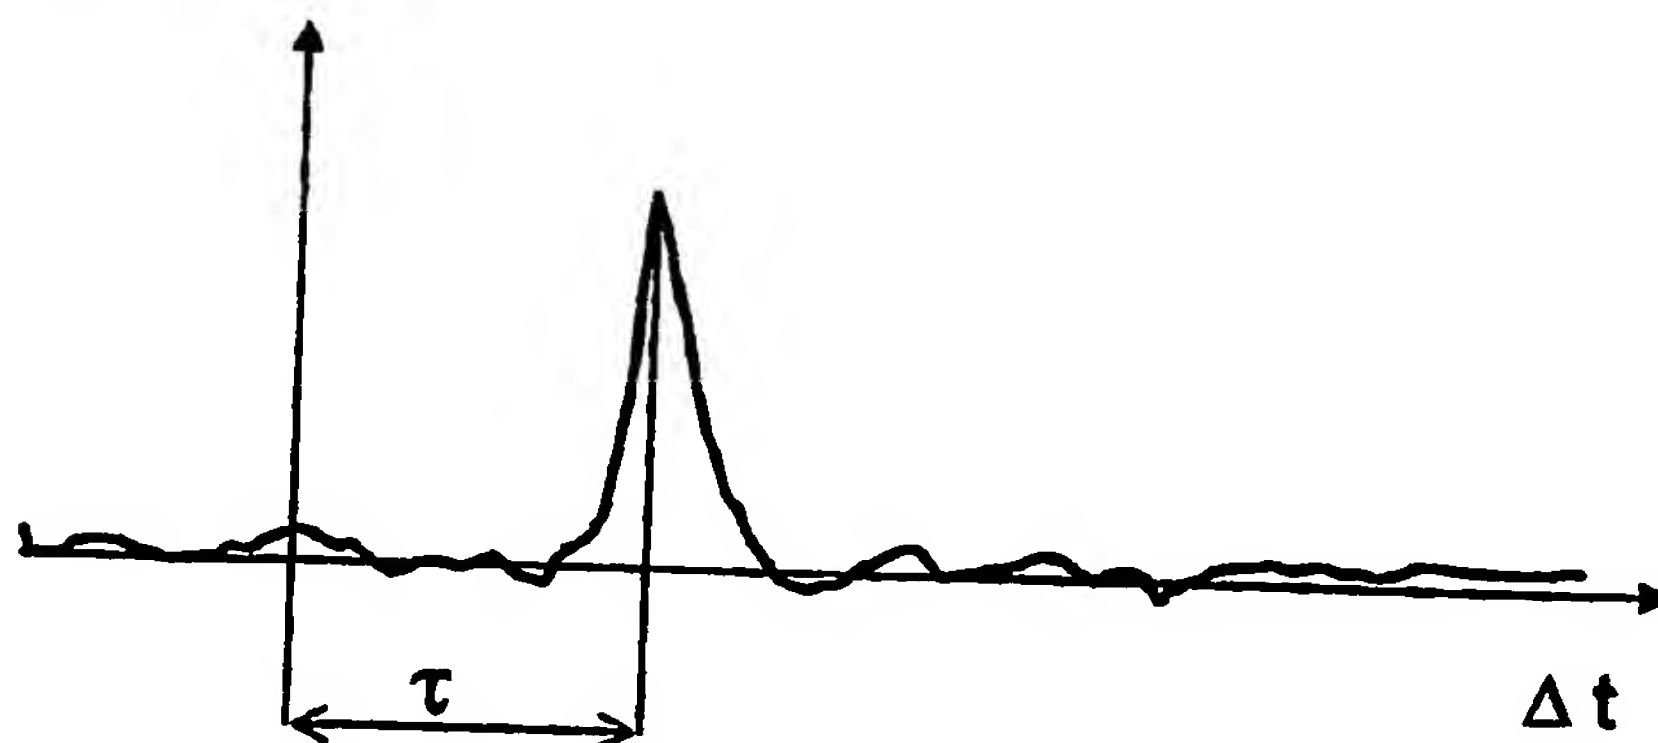


FIGURE 4B

5/12

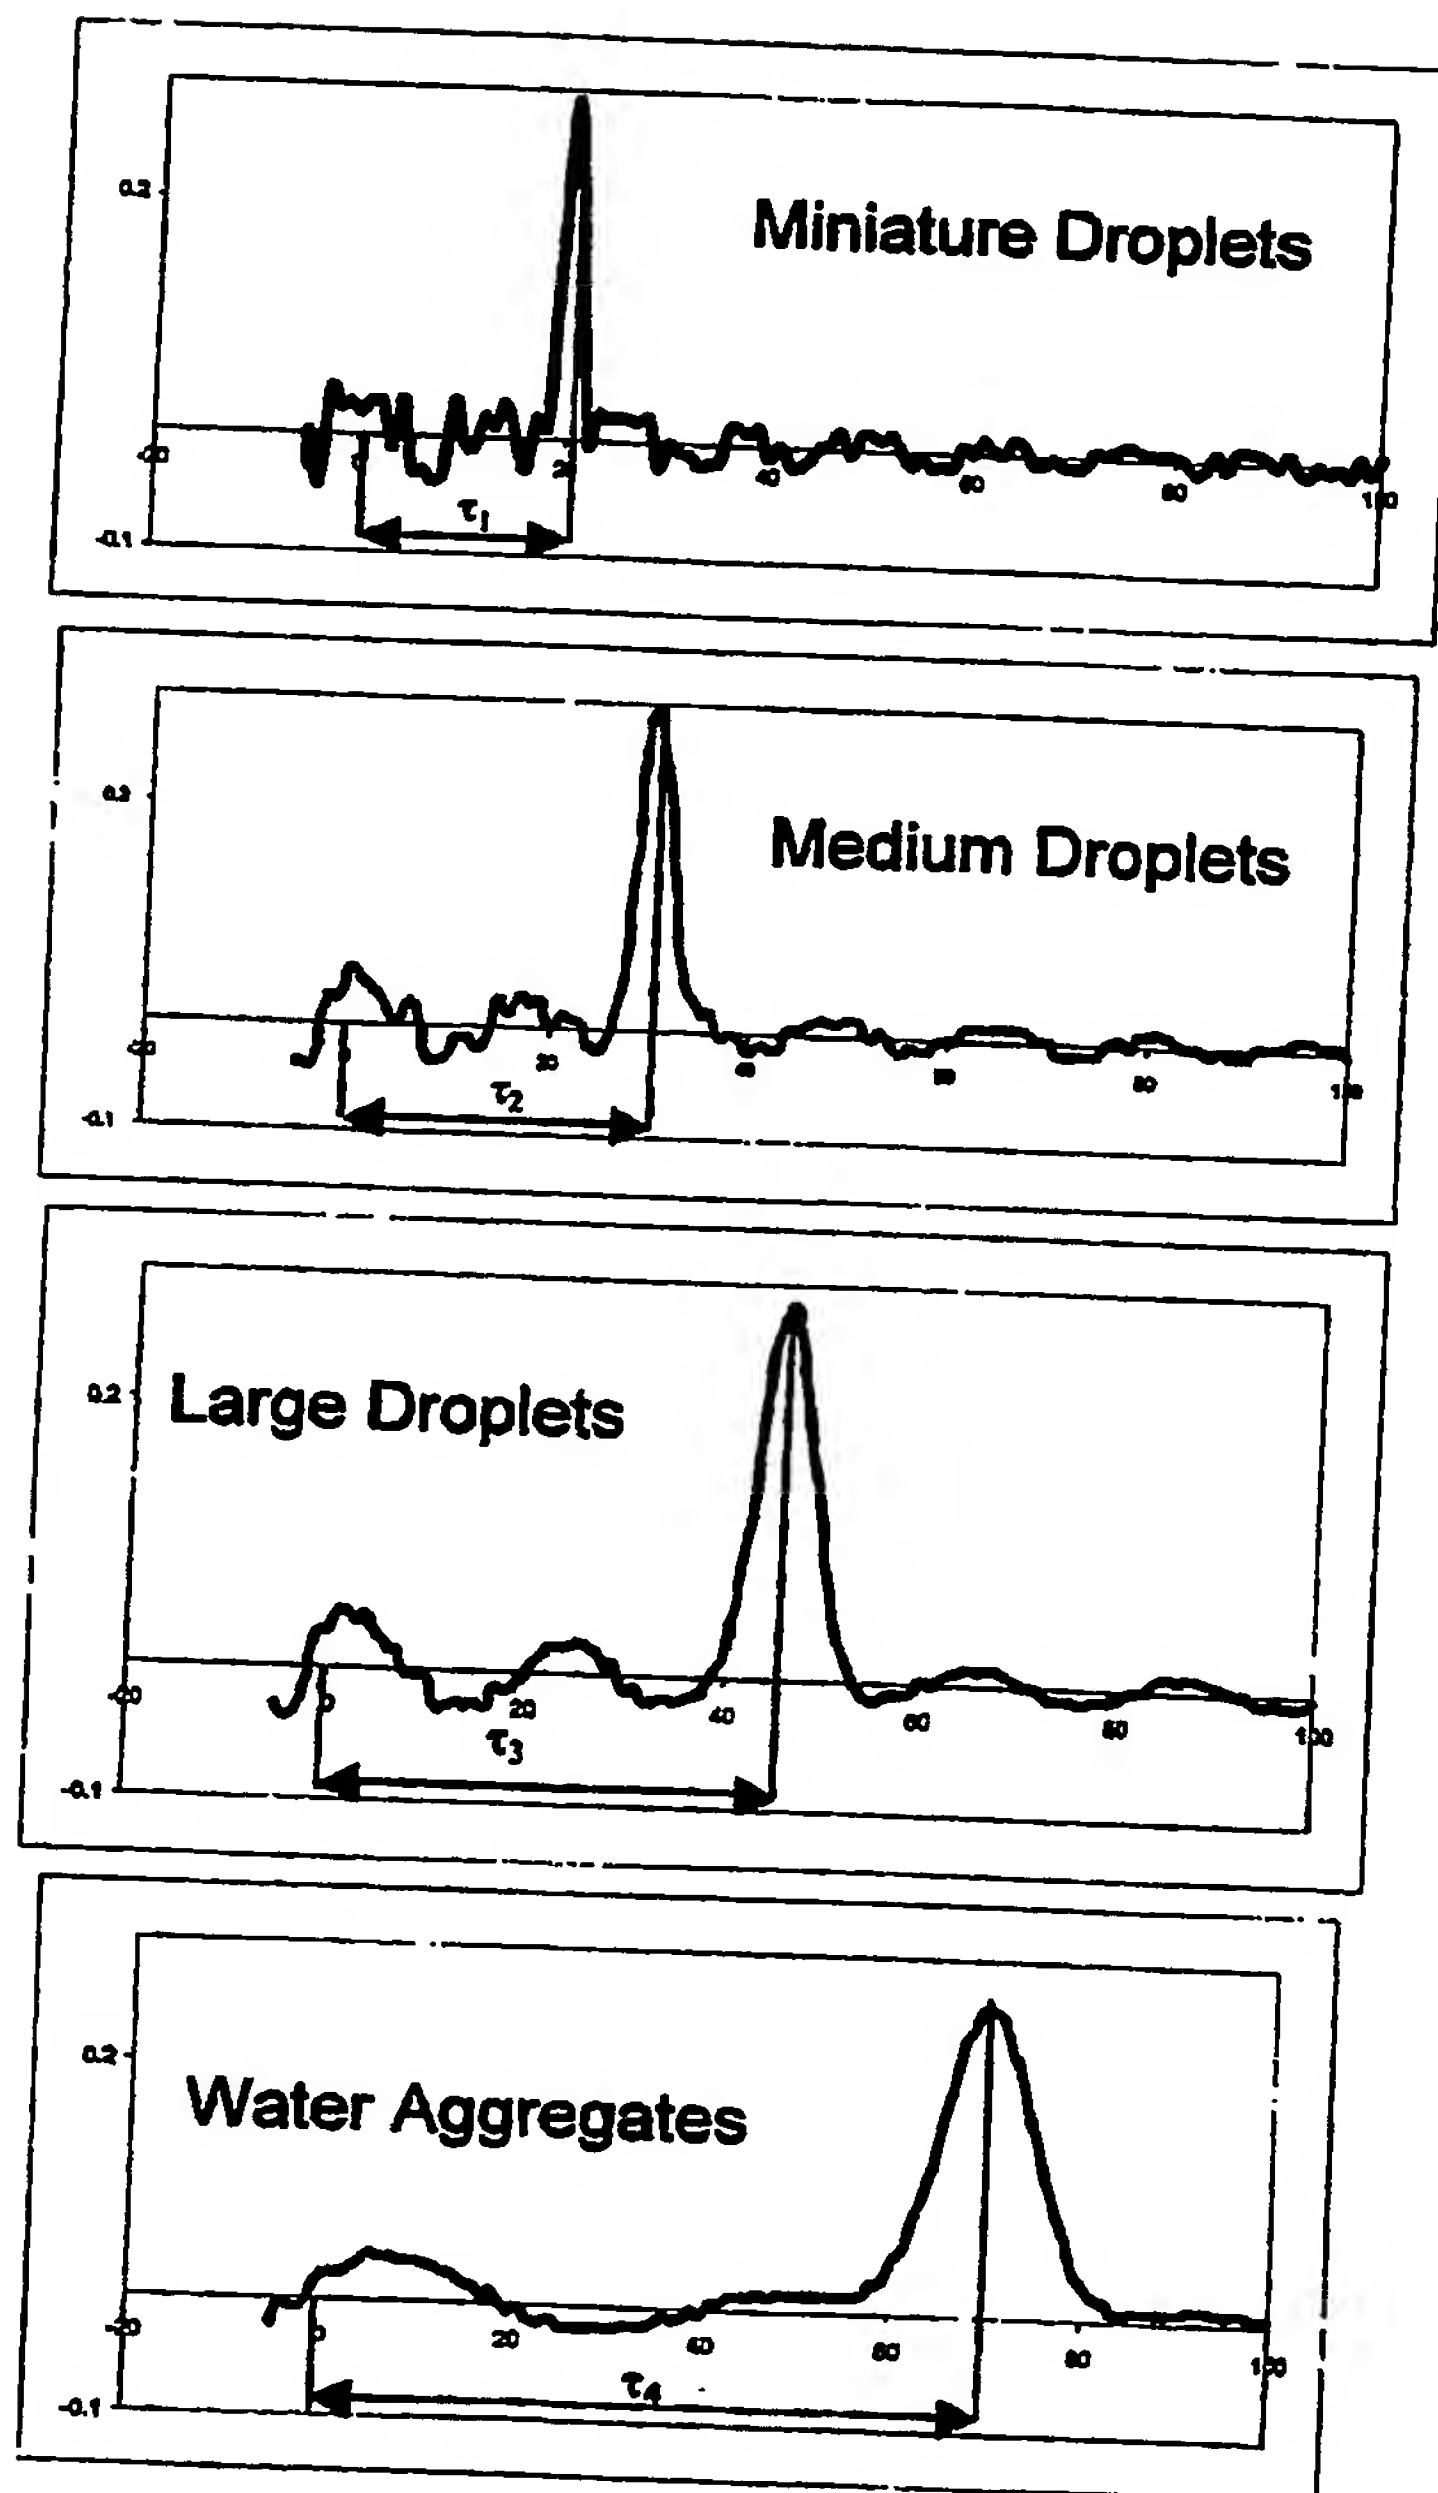


FIGURE 5

6/12

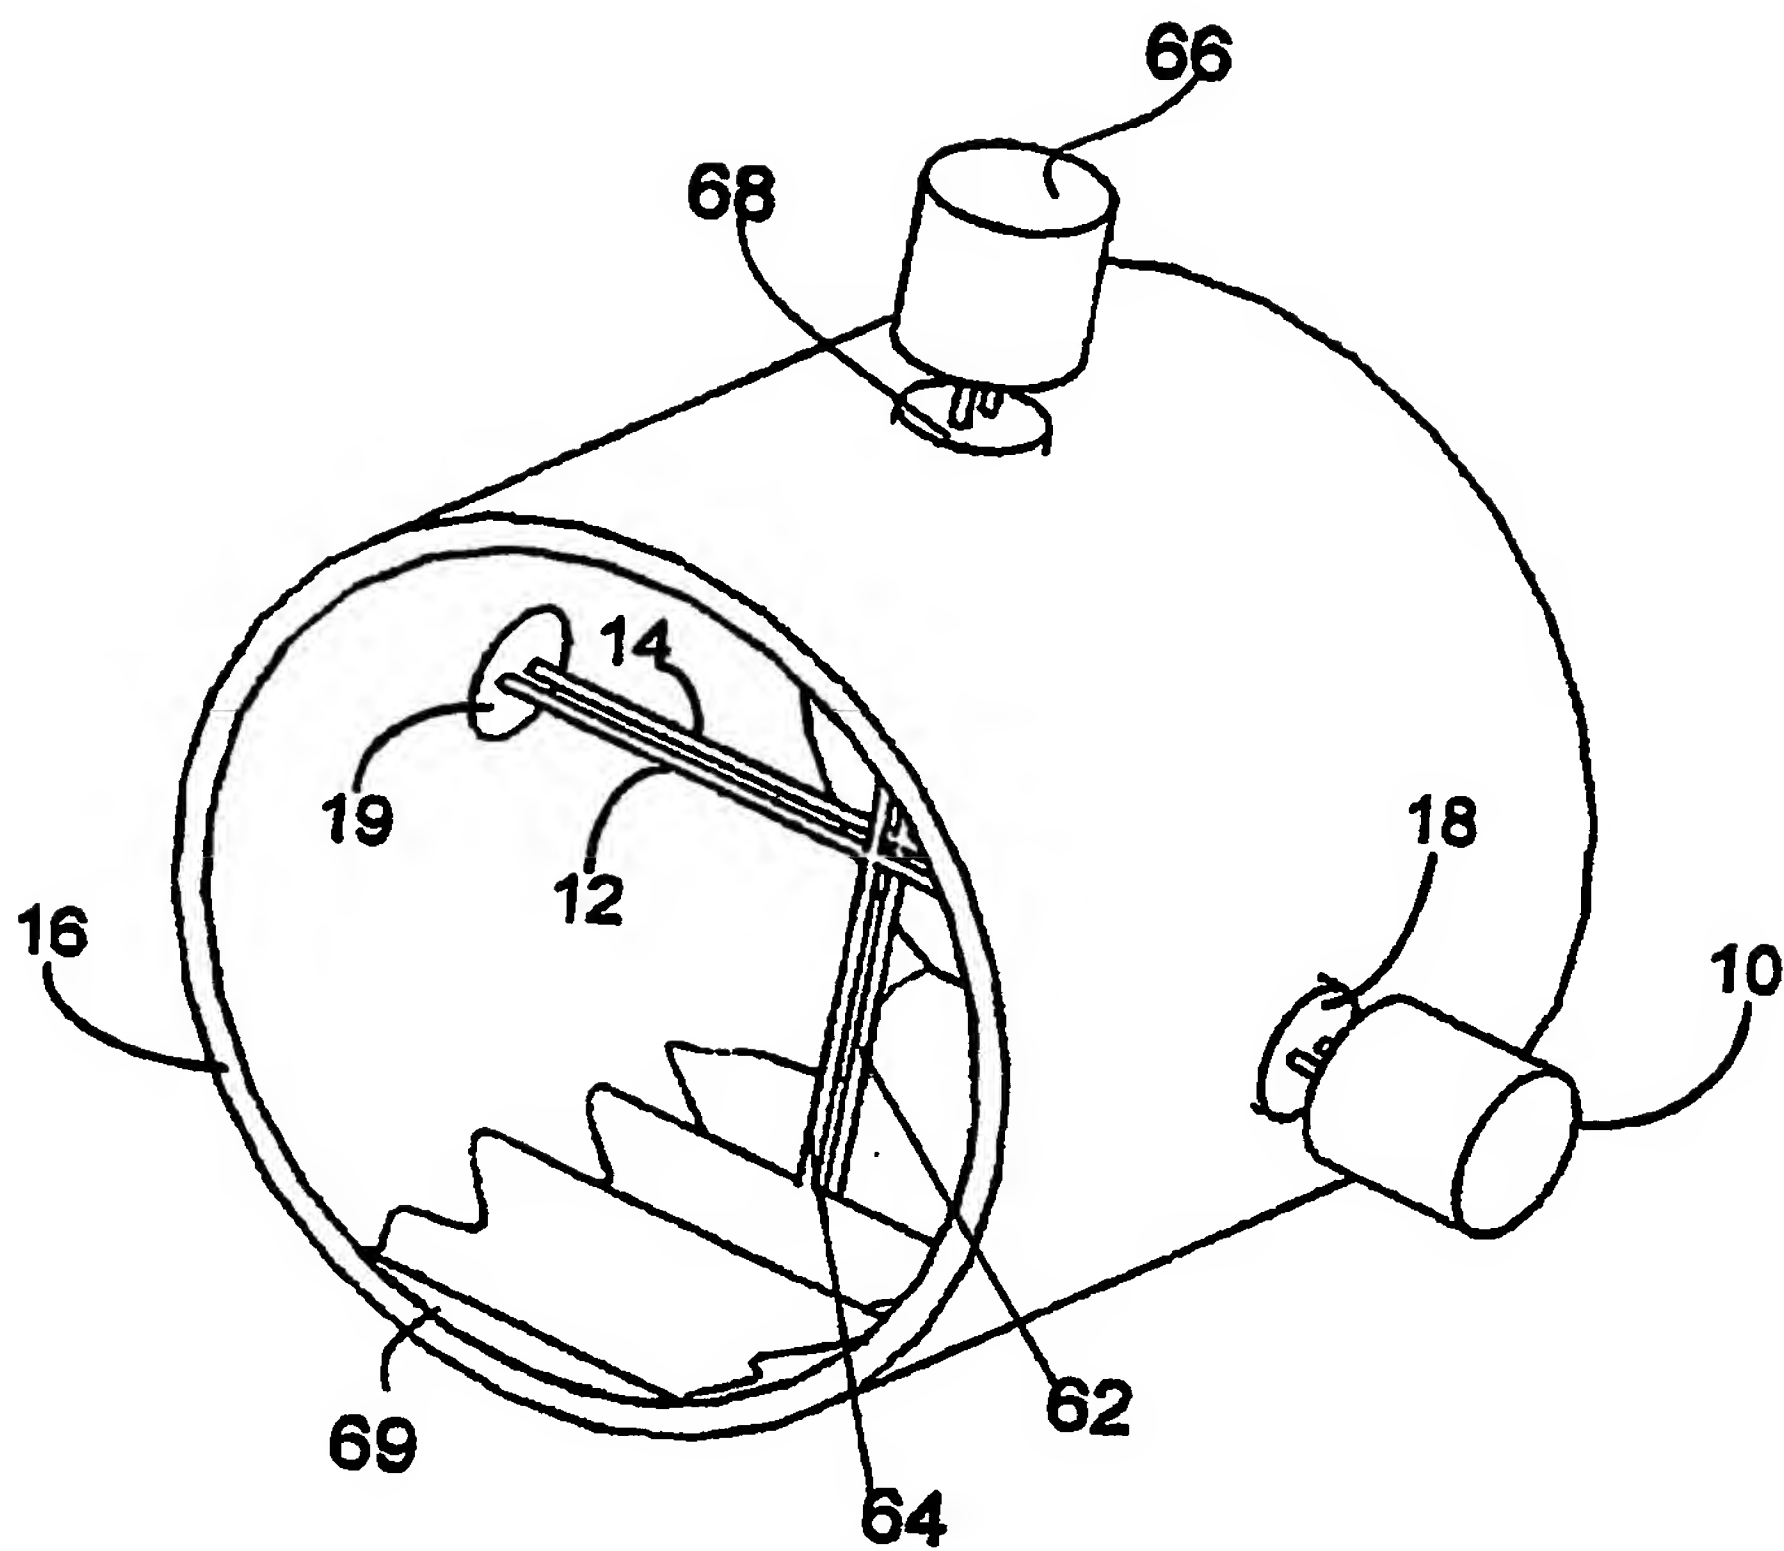


FIGURE 6

7/12

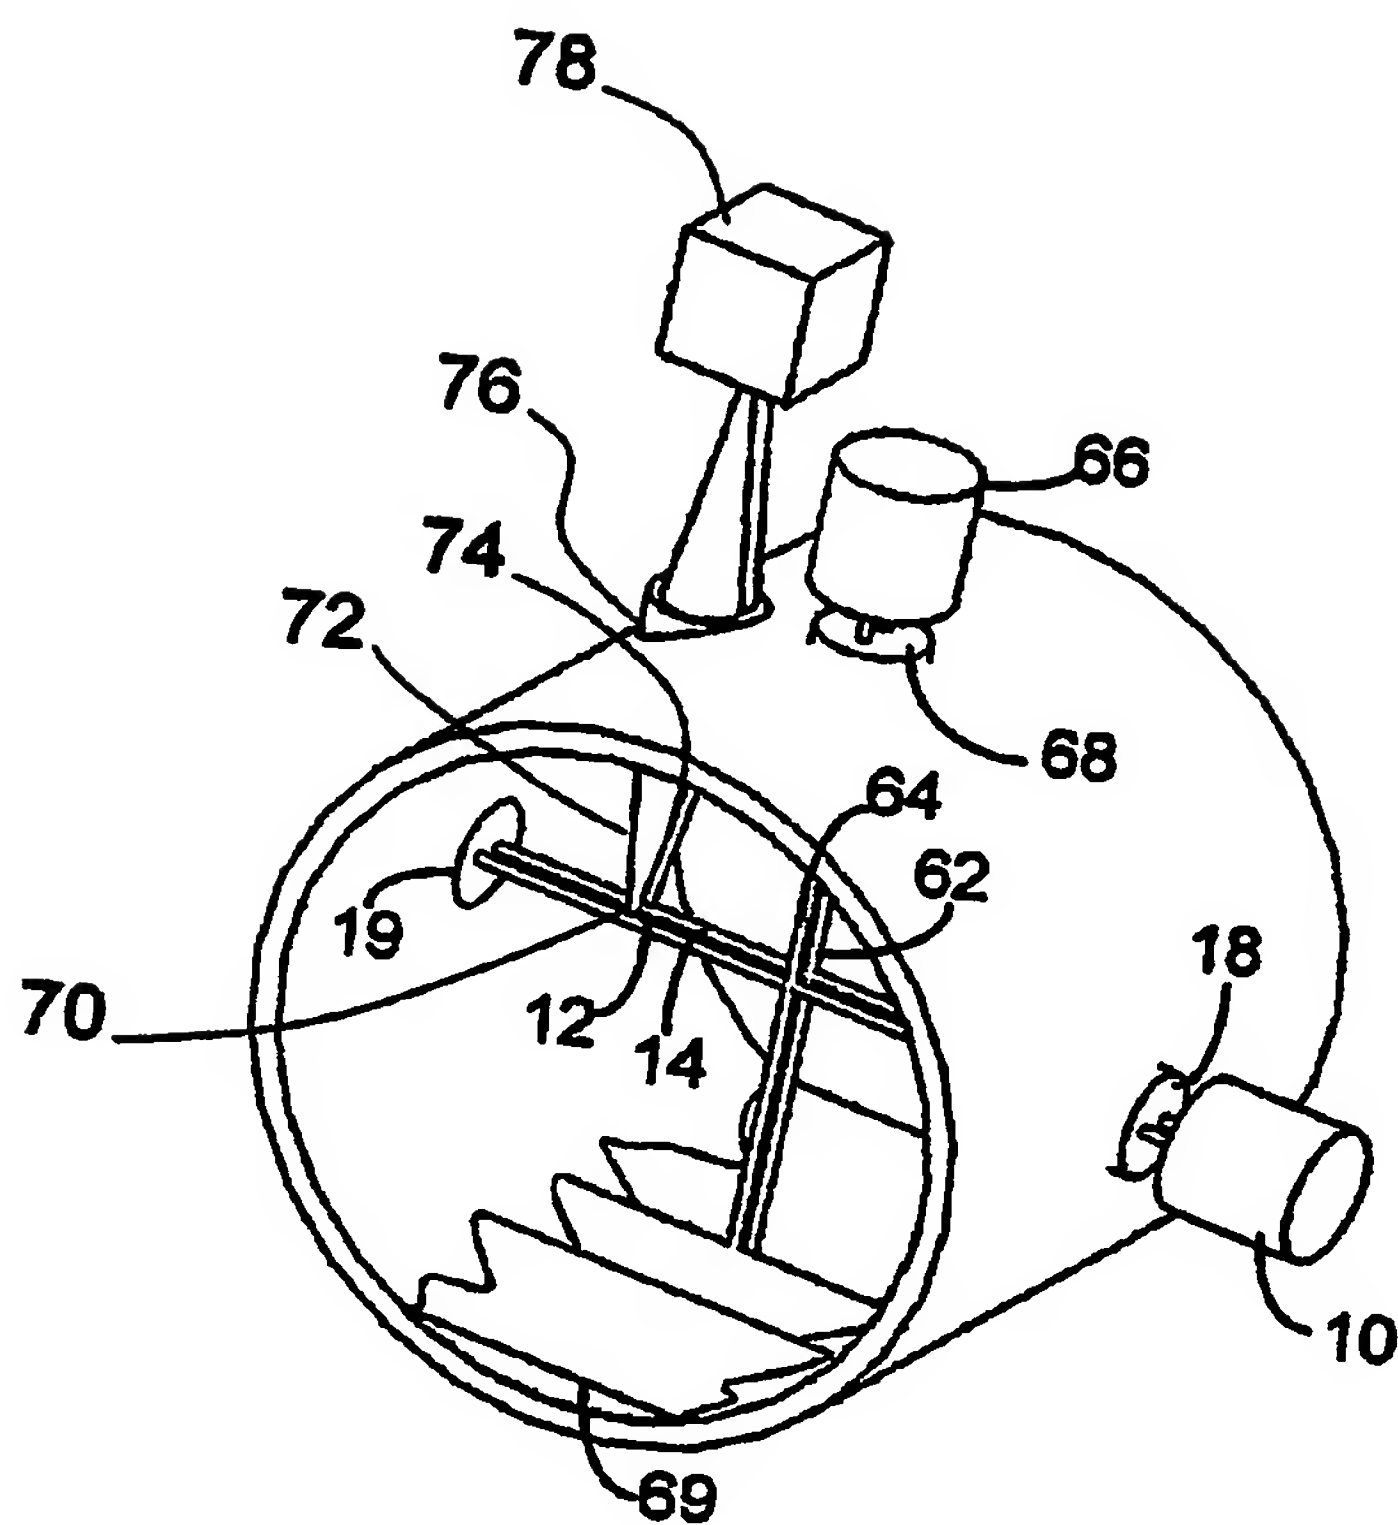


FIGURE 7

8/12

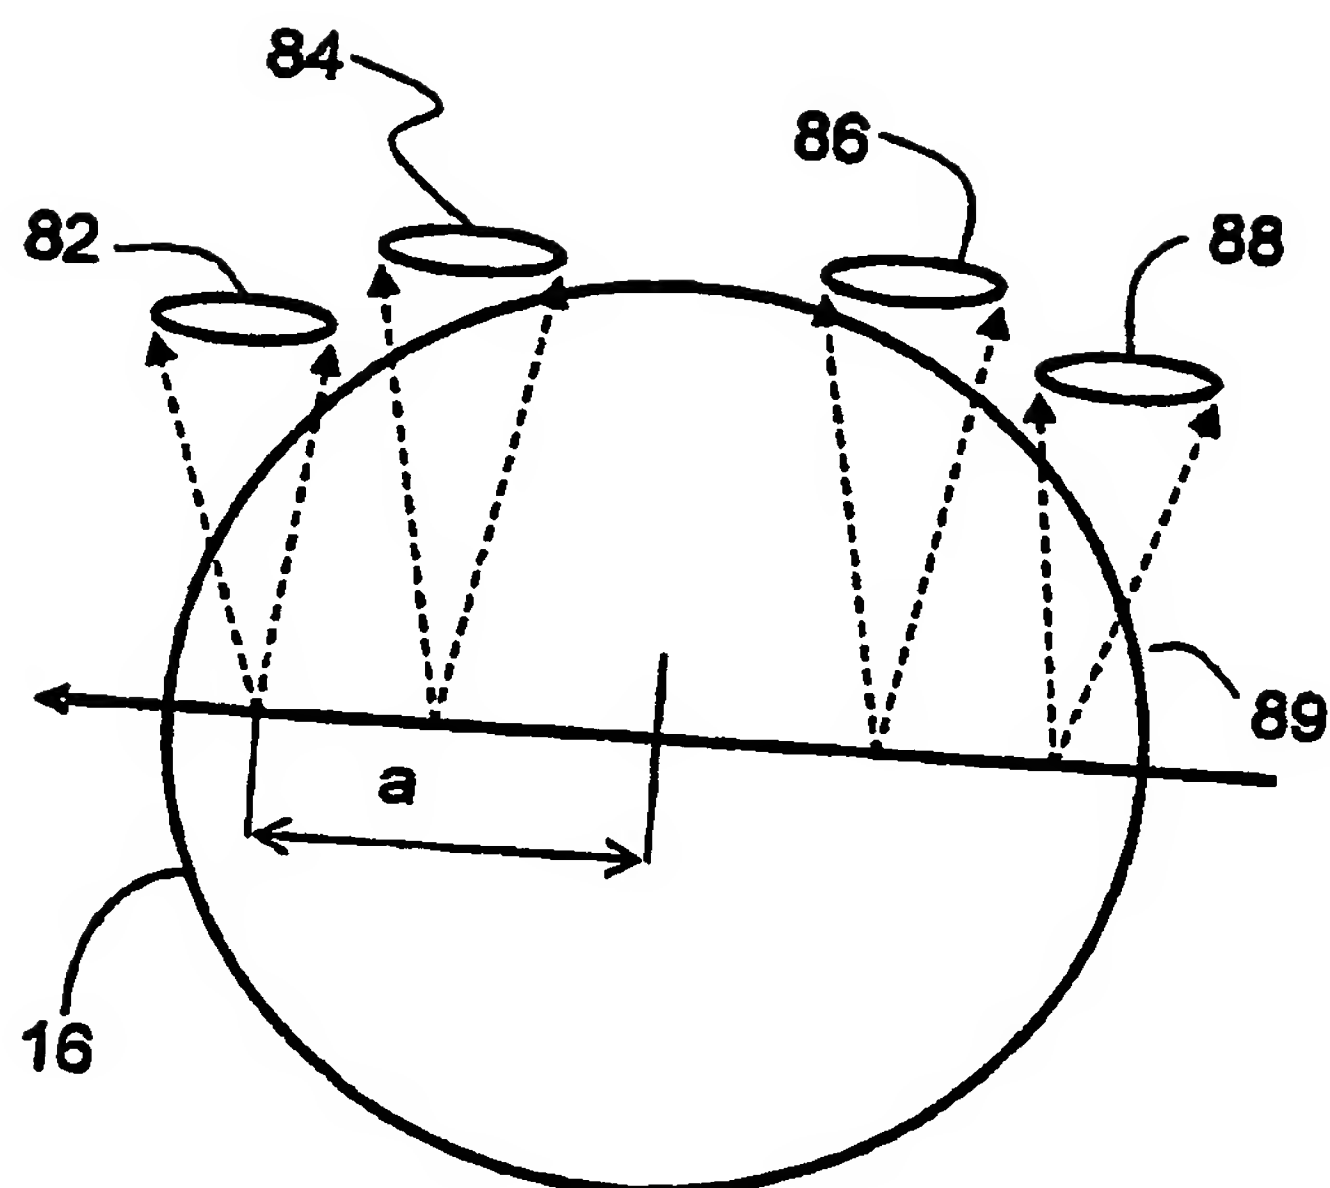


FIGURE 8

9/12

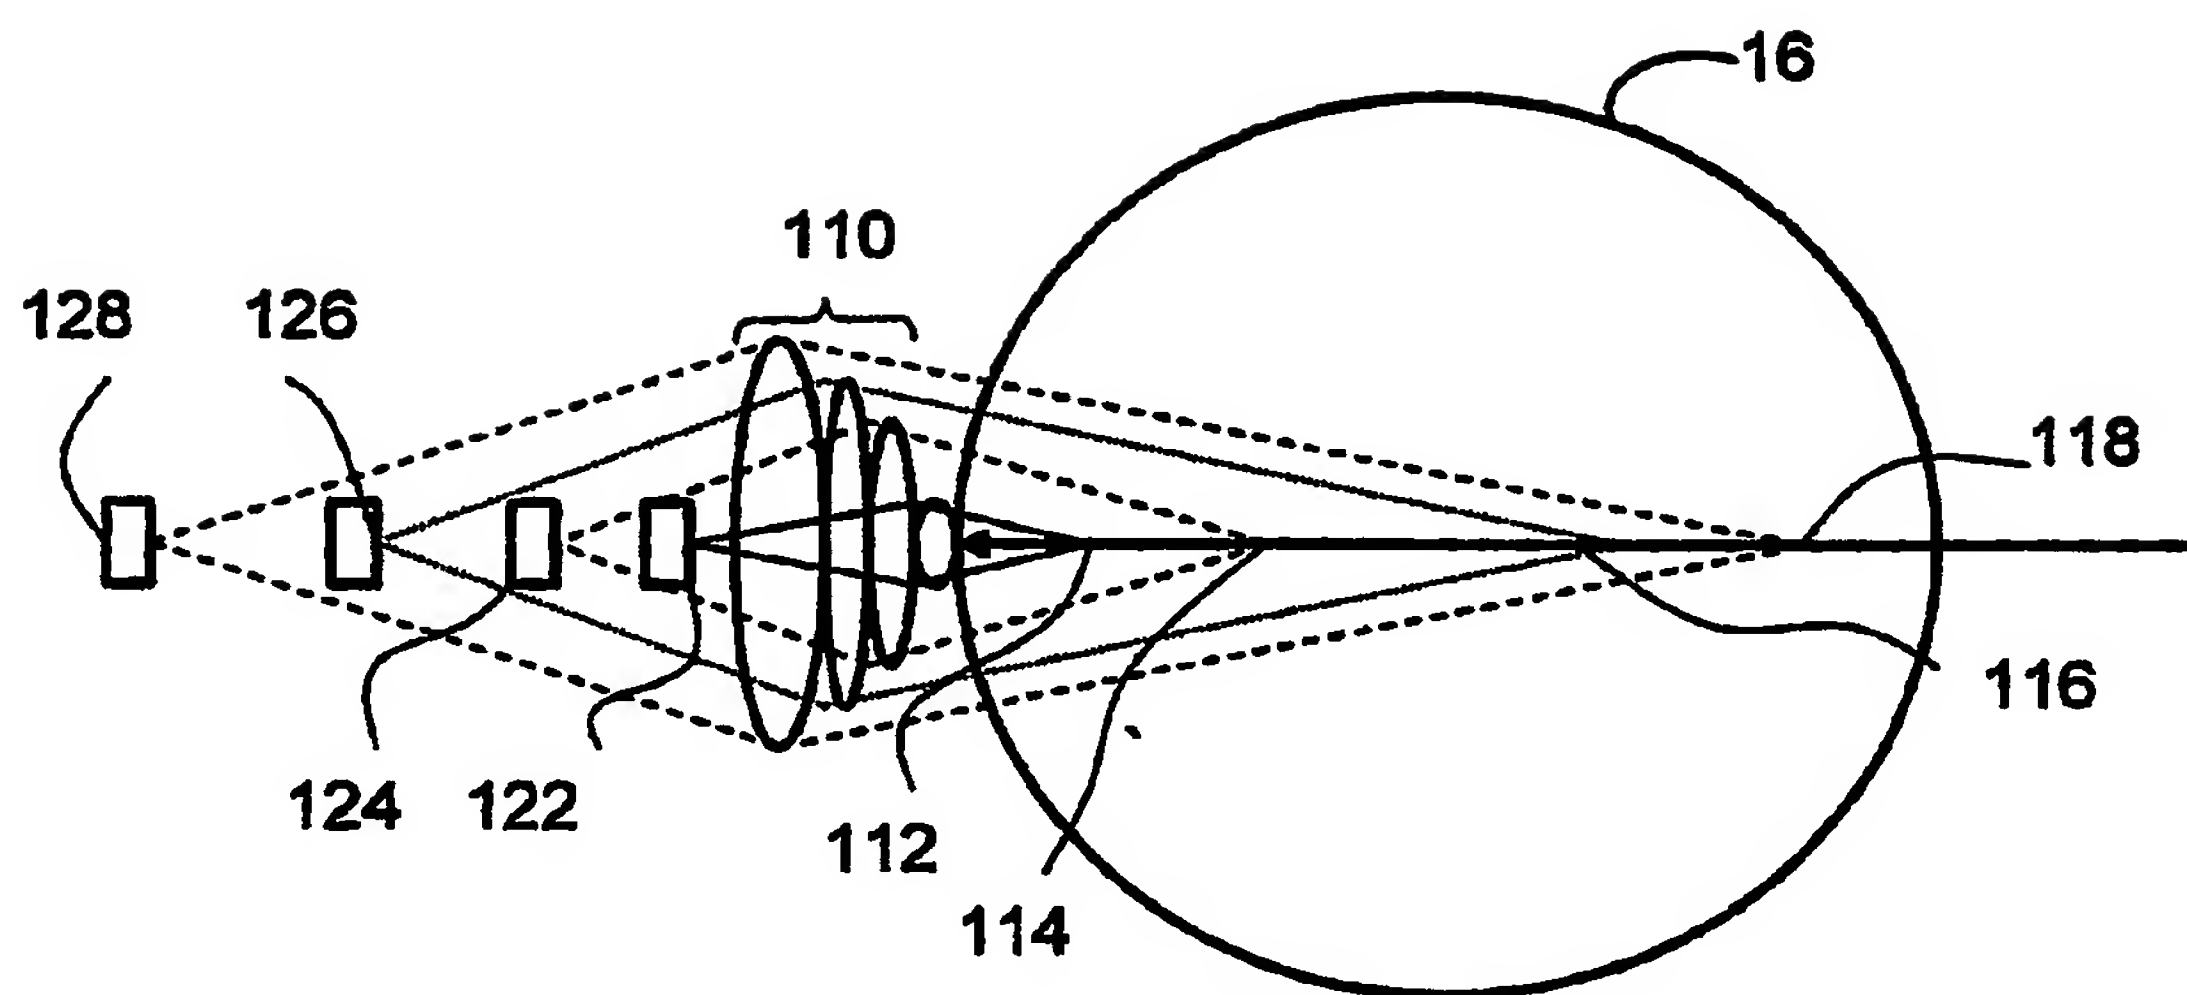


FIGURE 9

11/12

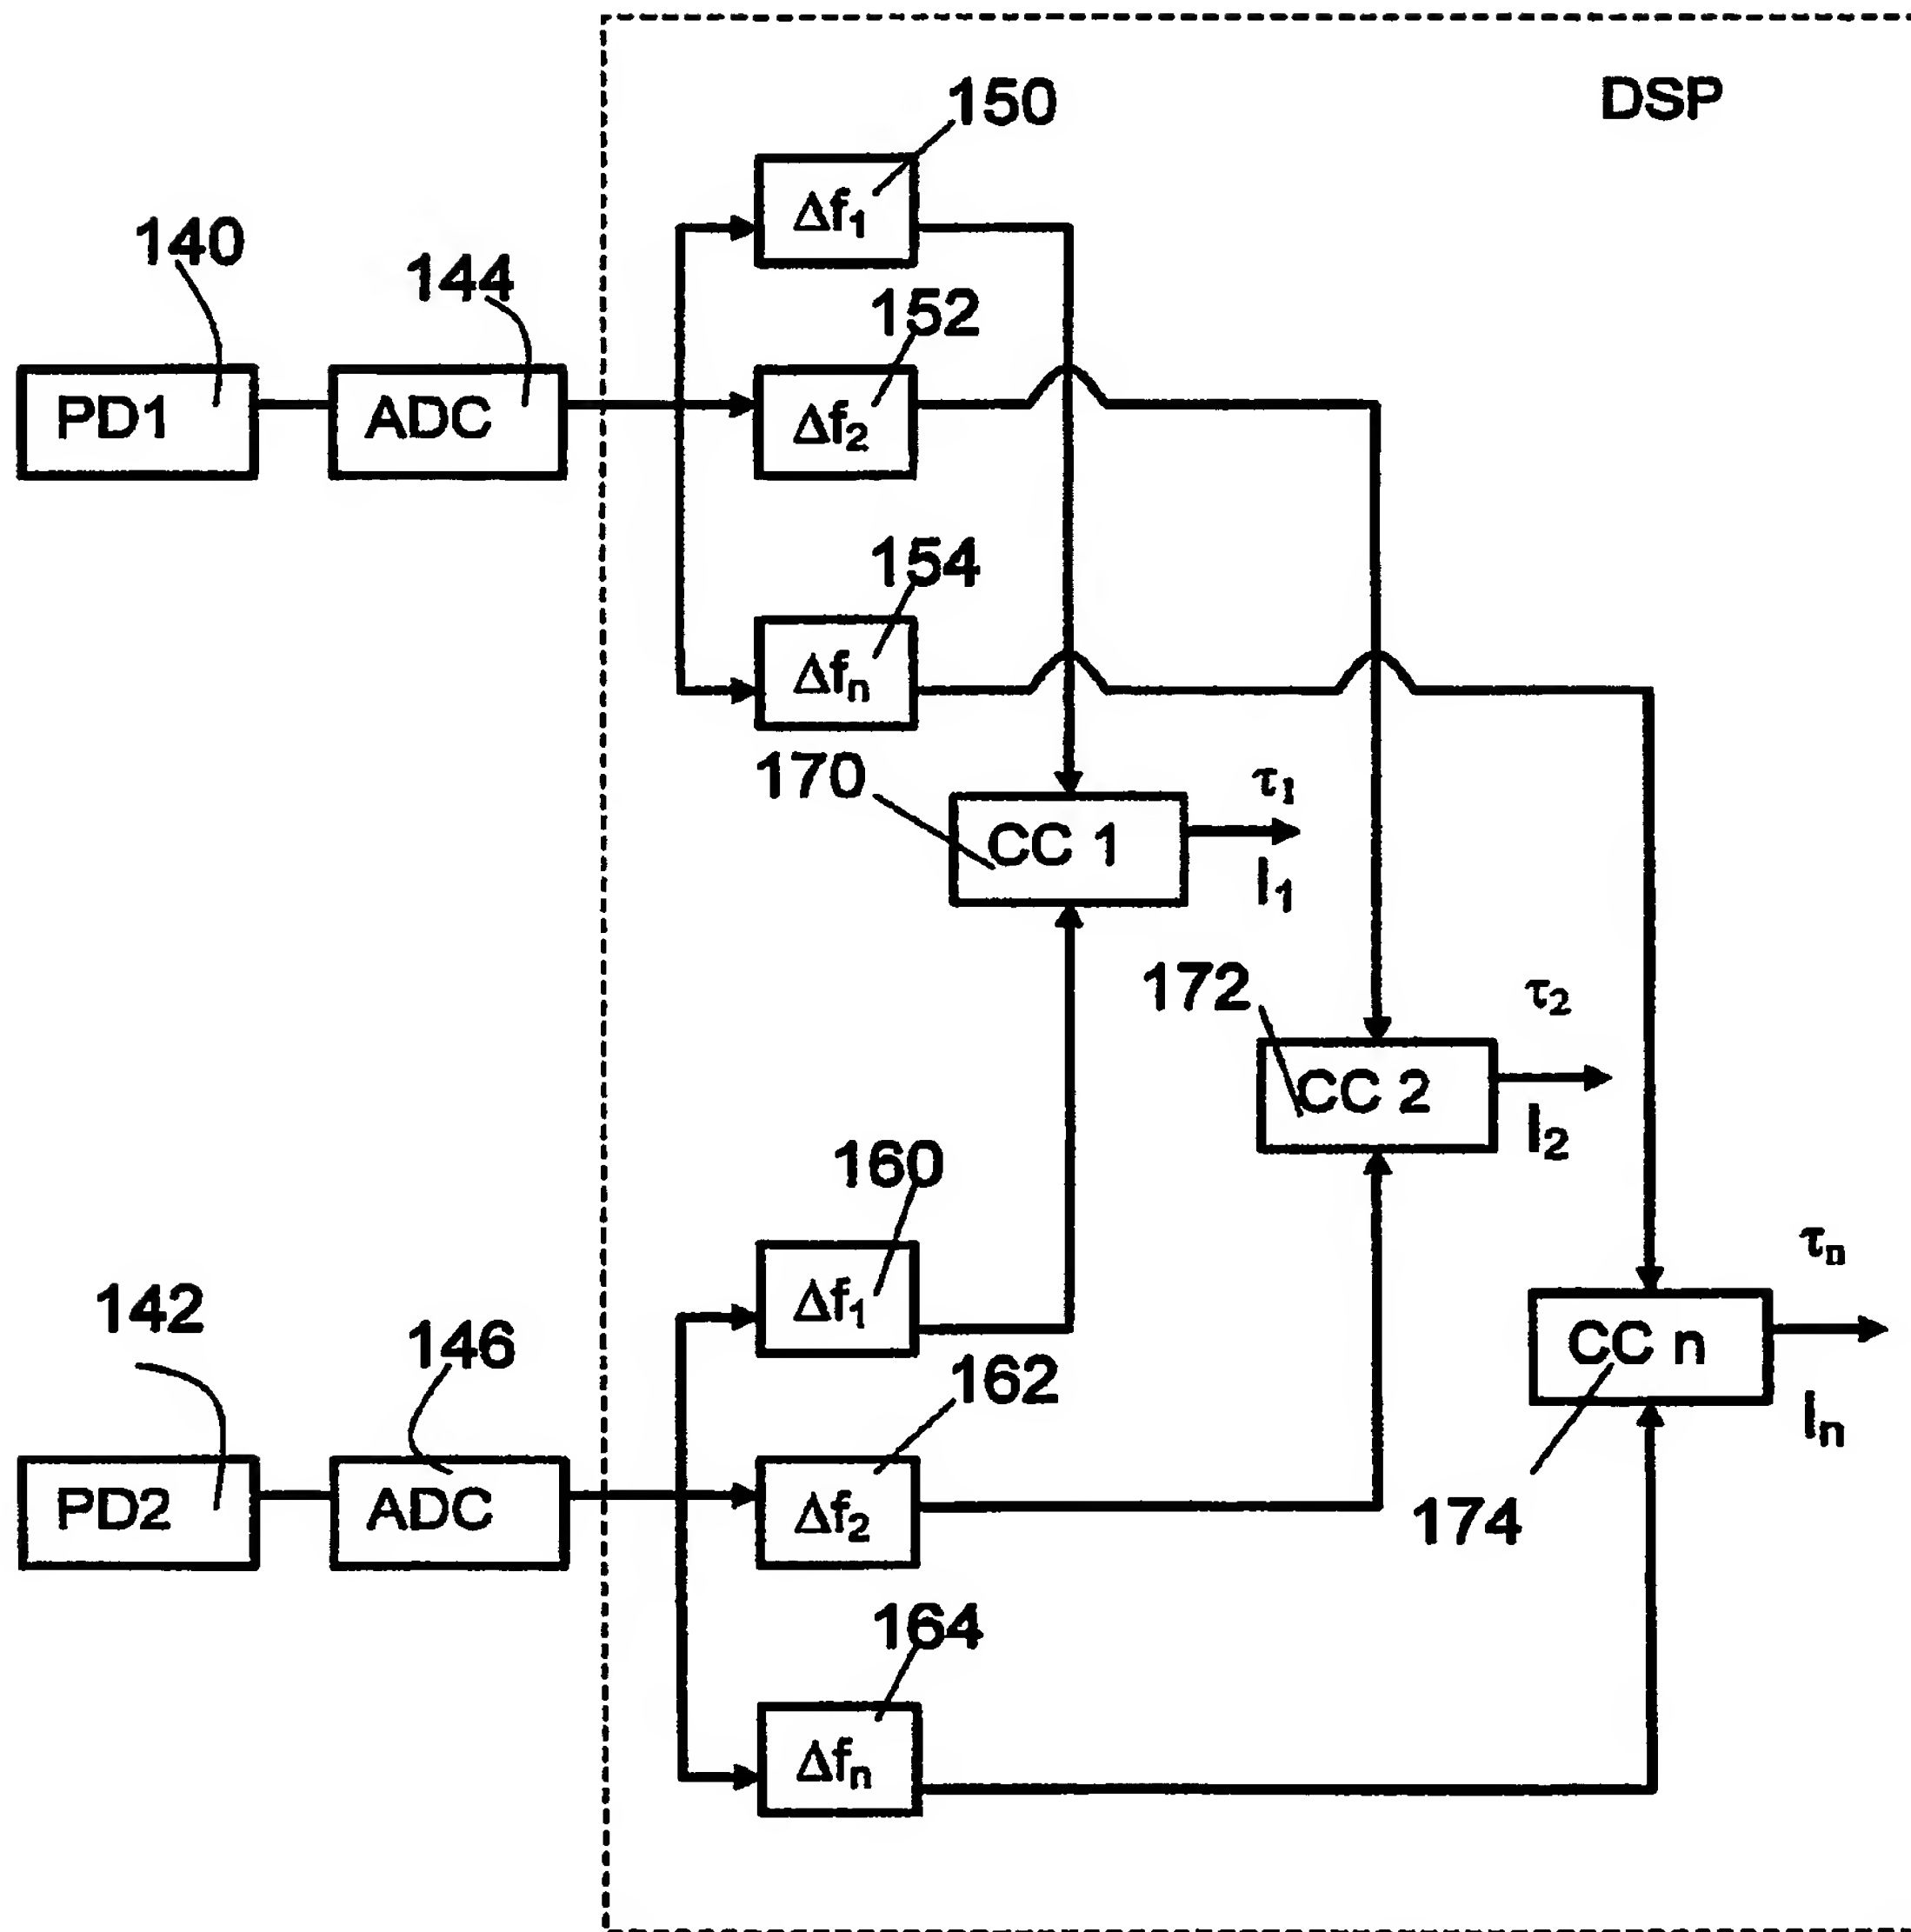


FIGURE 11

12/12

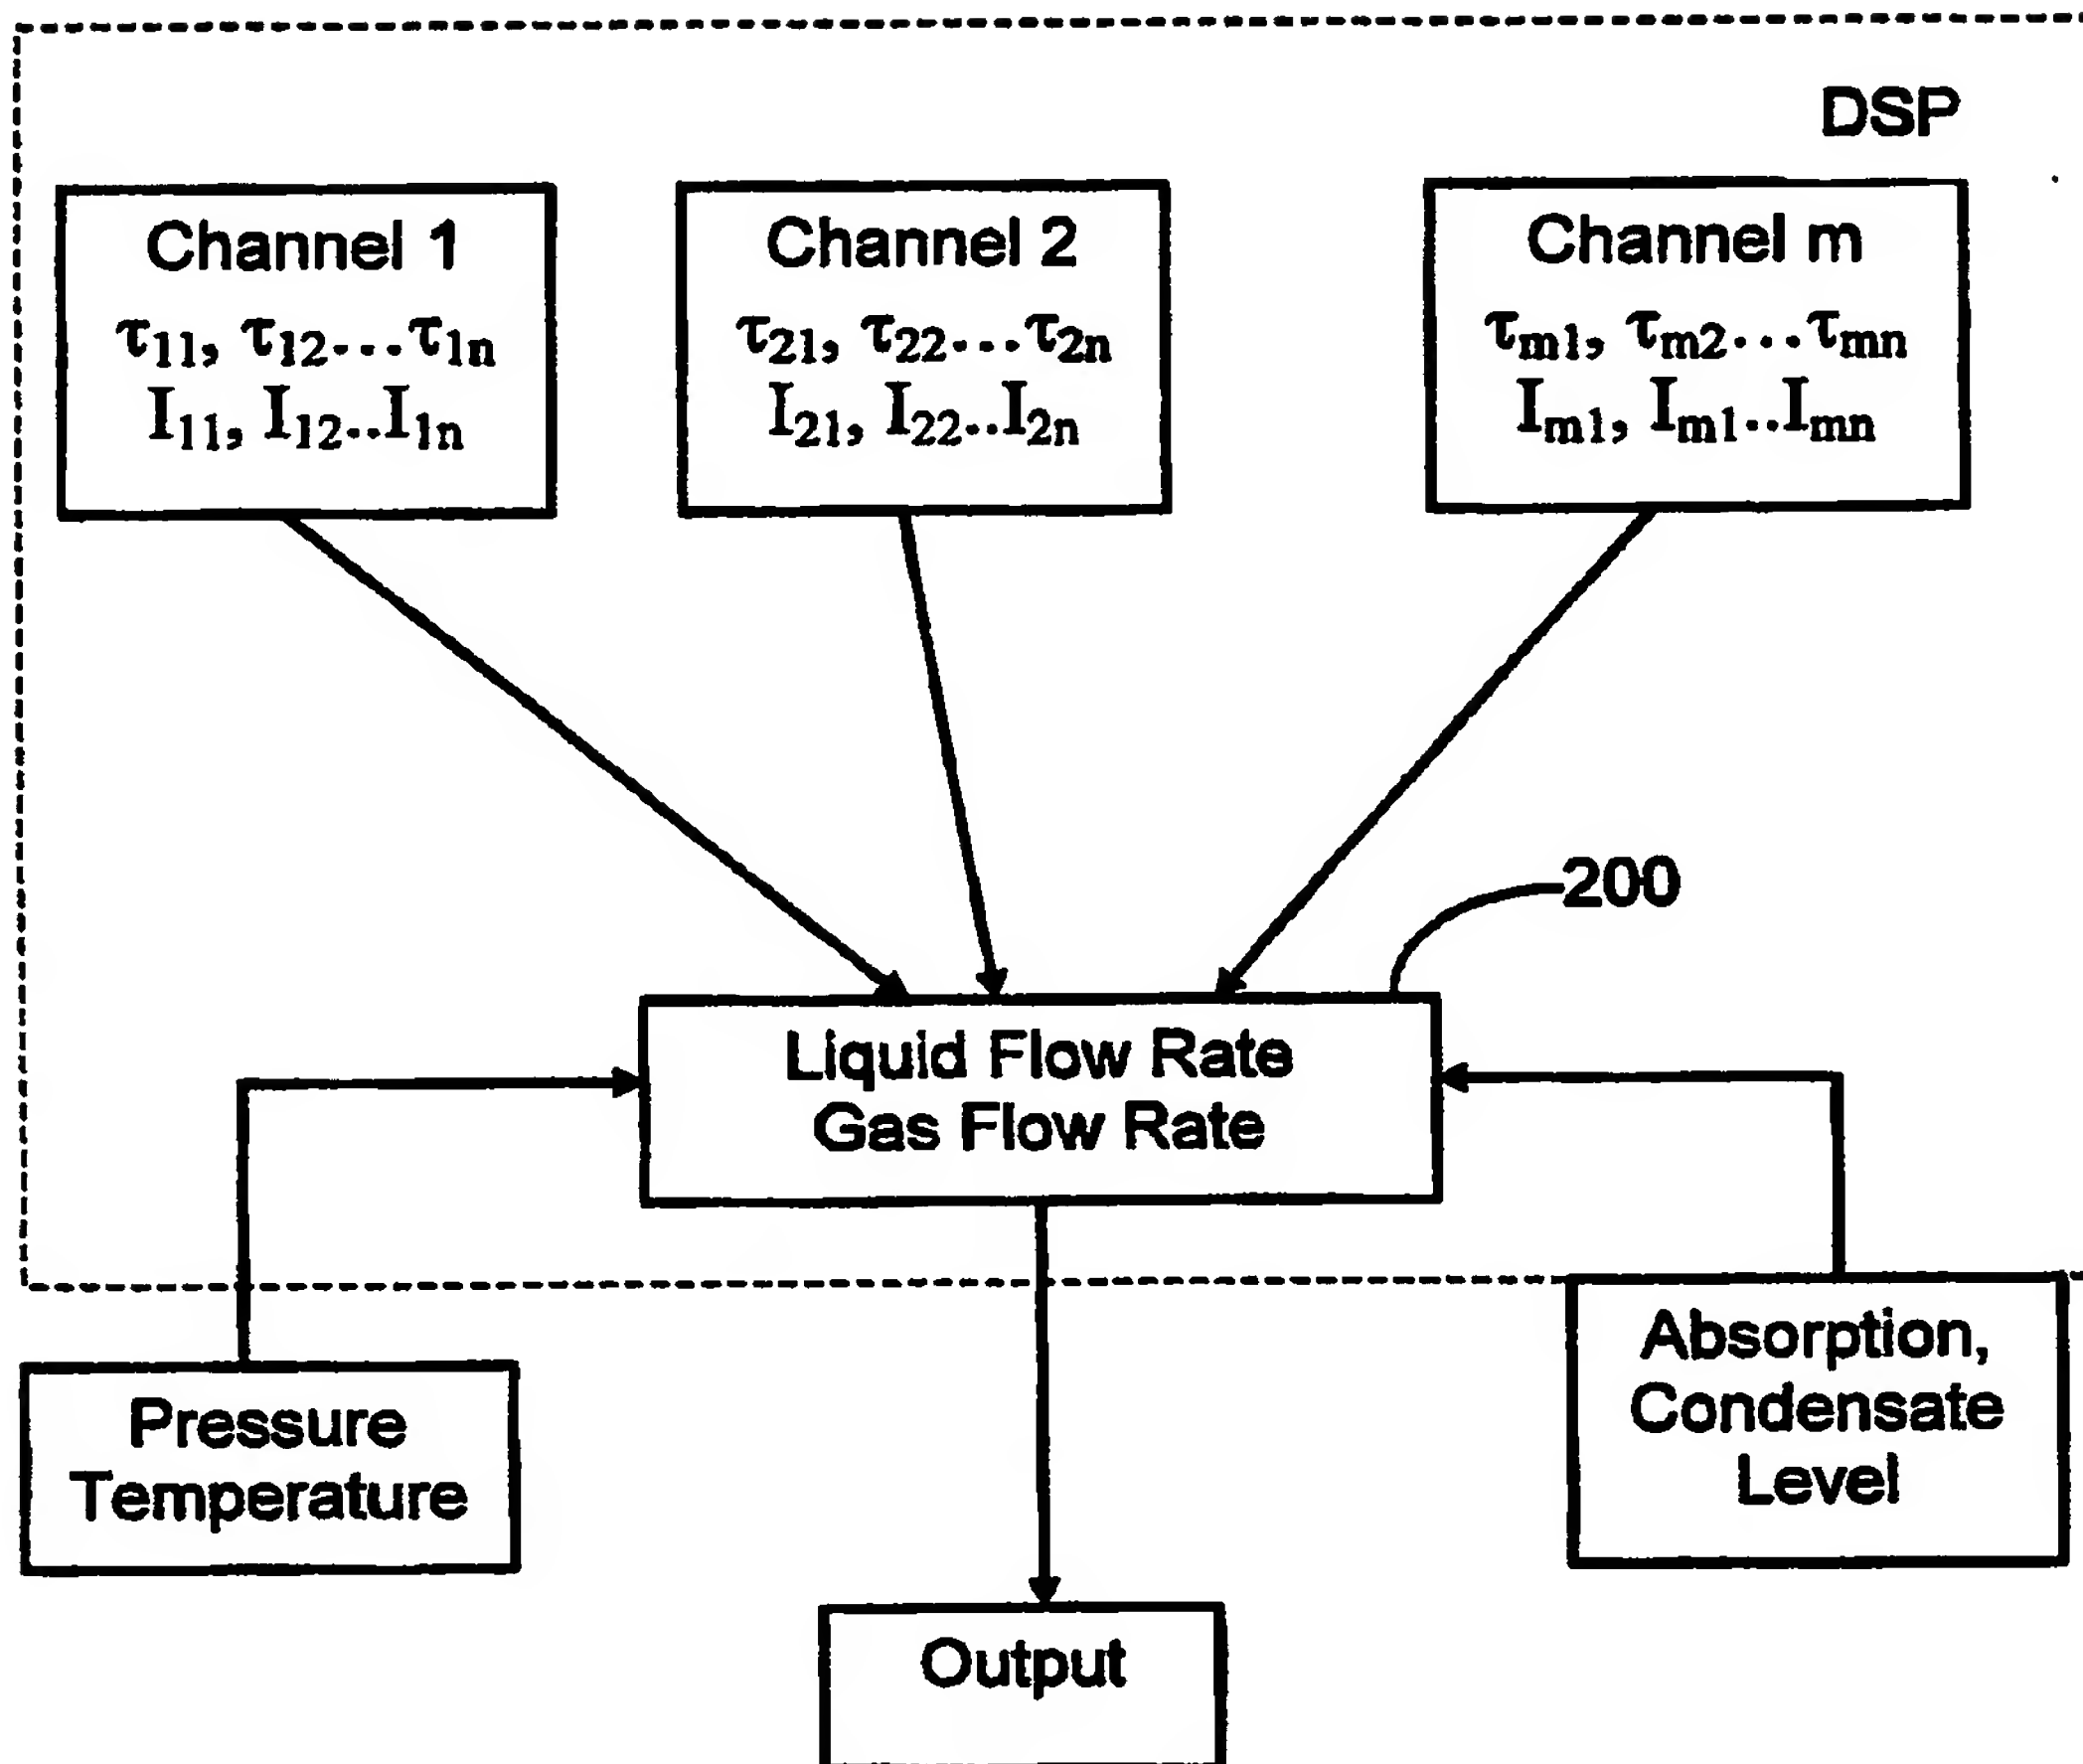


FIGURE 12

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.